


WAAS CH 99609 W31A	APP CRS 305°	Rwy Idg TDZE 6147 Apt Elev 6160
--	------------------------	---


RNAV (GPS) RWY 31

CHEYENNE RGNL/JERRY OLSON FLD (CYS)

RNP APCH. T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 45°C. ASR/PAR		MISSED APPROACH: Climb to 6600, then climbing left turn to 10400 direct SENSE and hold, continue climb-in-hold to 10400.		
ATIS 134.425 278.3	CHEYENNE APP CON★ 124.55 263.075	CHEYENNE TOWER★ 118.7(CTAF) 257.8	GND CON 121.9 254.275	UNICOM 122.95

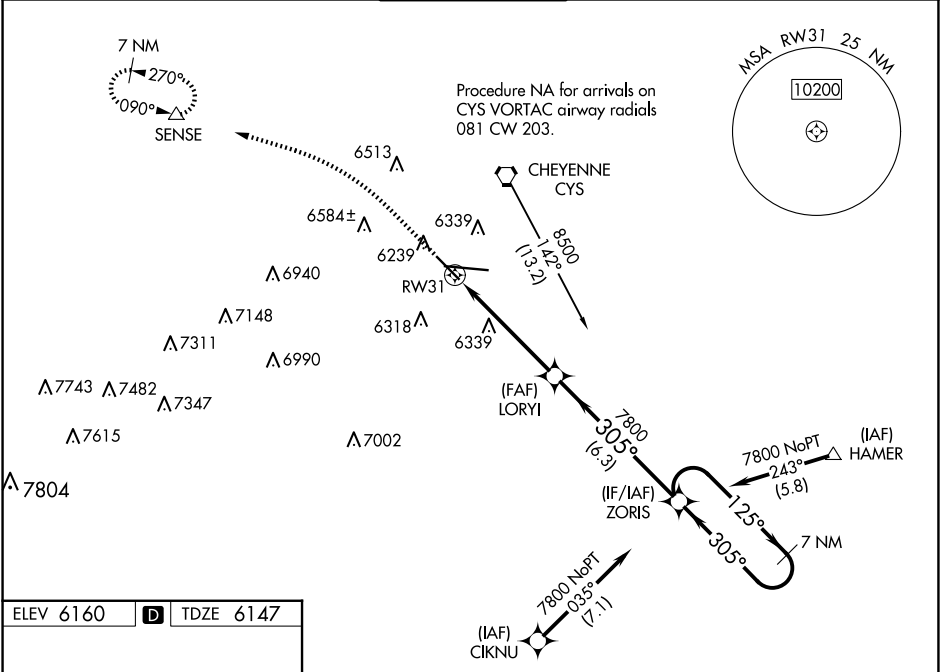

ELEV 6160	D	TDZE 6147
-----------	---	-----------

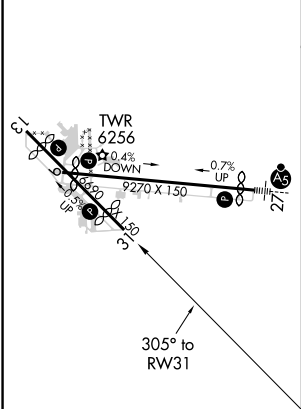

6600 10400 SENSE		LORYI 7800 ZORIS		7 NM Holding Pattern
*LNAV only		*1.3 NM to RW31		
RW31		1.3 3.8 NM 6.3 NM		
CATEGORY	A	B	C	D
LPV DA	6397-3/4 250 (300-3/4)			
LNAV/VNAV DA	6458-7/8 311 (300-7/8)			
LNAV MDA	6600-1	453 (500-1)	6600-1 3/8	453 (500-1 3/8)
CIRCLING	6640-1	480 (500-1)	6900-2 740 (800-2)	6920-2 1/2 760 (800-2 1/2)