



LOC I-COS 109.9	APP CRS 352°	Rwy Idg TDZE Apt Elev	11022 6075 6187
---------------------------	------------------------	-----------------------------	--

ILS or LOC RWY 35L
CITY OF COLORADO SPRINGS MUNI (COS)

ADF required for LOC only.	MALSR	MISSED APPROACH: Climb to 6700 then climbing right turn to 9000 on heading 047° and BRK VOR/DME R-091 to ADANE INT/BRK 11.1 DME and hold.
⚠ RADAR monitoring required when R-2601 in use. For inop ALS, increase S-LOC 35L Cat C/D visibility to RVR 4500. *RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6	CLNC DEL 134.45 363.125
----------------------------	---	-------------------------------------	-------------------------------	-----------------------------------

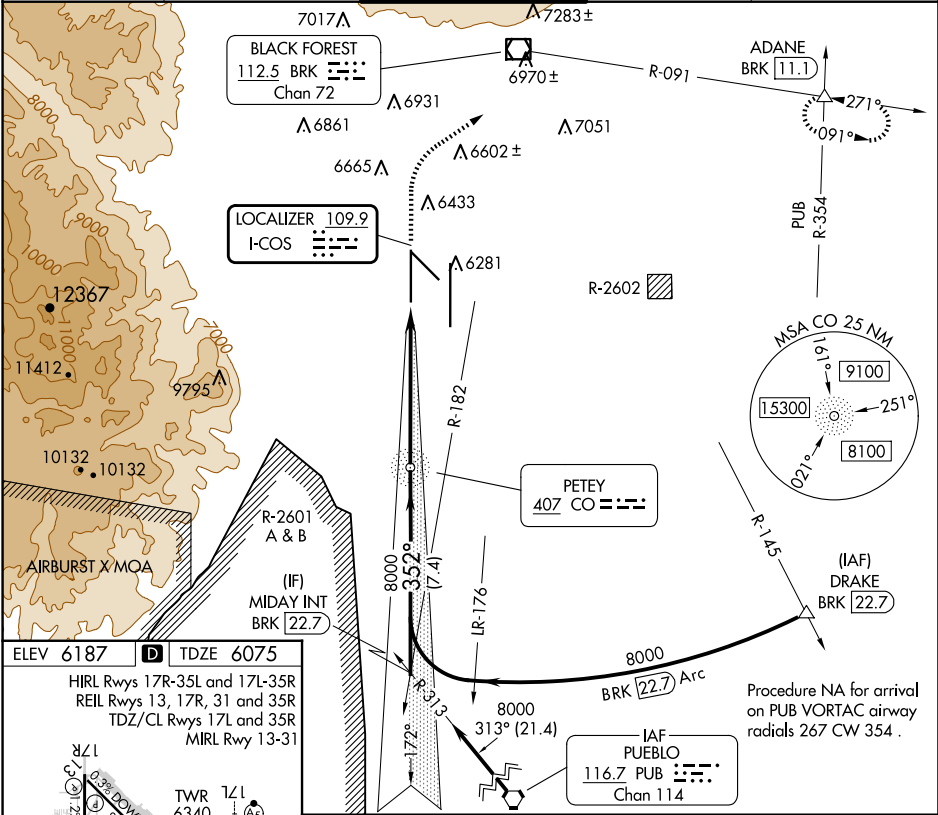

MIDAY INT BRK [22.7]	CO NDB 7996	6700 ↑	9000 hdg 047°	BRK R-091	ADANE △
VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 72).					
8000 — 352° — 8000					
GS 3.00° TCH 51					
7.4 NM — 6 NM					
CATEGORY	A	B	C	D	
S-ILS 35L*	6275/24 200 (100-½)				
S-LOC 35L	6340/24 265 (200-½)				
☒ CIRCLING	6740-1 553 (600-1)	6760-1 573 (600-1)	6980-2¼ 793 (800-2¼)	7240-3 1053 (1100-3)	

SW-1, 17 APR 2025 to 15 MAY 2025

SW-1, 17 APR 2025 to 15 MAY 2025