

WAAS CH 72800 W17B	APP CRS 172°	Rwy Idg TDZE 6177 Apt Elev 6187
--	------------------------	---

RNAV (GPS) Y RWY 17R

CITY OF COLORADO SPRINGS MUNI (COS)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.
Simultaneous approach authorized with ILS or LOC RWY 17L and ILS RWY 17L (SA CAT I).
LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 7000 then climbing left turn to 9000 direct DRAKE and hold.

ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6	CLNC DEL 134.45 363.125
----------------------------	---	-------------------------------------	-------------------------------	-----------------------------------

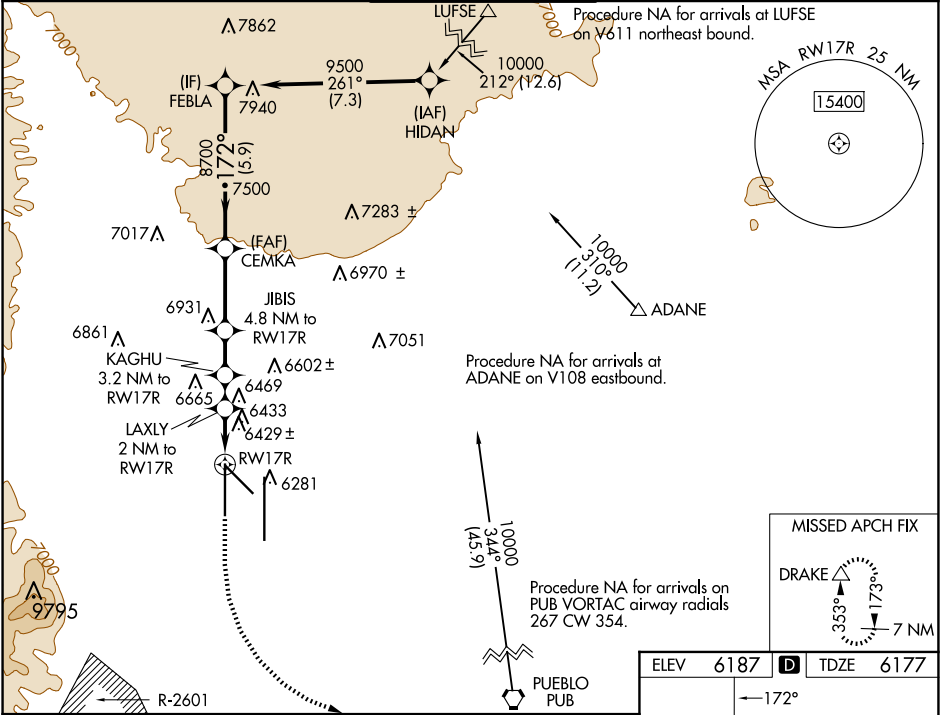

ELEV 7000 9000 DRAKE		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 49).		CEMKA FEBLA	
LAXLY 2 NM to RW17R		KAGHU 3.2 NM to RW17R		JIBIS 4.8 NM to RW17R	
RW17R		RW17R		RW17R	
1.4 NM to RW17R		1.2 NM to RW17R		1.6 NM to RW17R	
1.4 NM		0.6 NM		1.2 NM	
6860		7240		8700	
172°		172°		172°	
GP 3.00°		TCH 55		9500	
CATEGORY	A	B	C	D	
LPV DA	6377/40 200 (200-¾)				
LNAV/VNAV DA	6752-2 575 (600-2)				
LNAV MDA	6680/55	503 (500-1)	6680-1⅓	503 (500-1⅓)	
CIRCLING	6740-1 553 (600-1)	6800-1 613 (700-1)	7040-2½ 853 (900-2½)	7260-3 1073 (1100-3)	

