


WAAS CH 53602 W35B	APP CRS 352°	Rwy Idg TDZE 6118 Apt Elev 6187
--	------------------------	---


RNAV (GPS) Y RWY 35R
CITY OF COLORADO SPRINGS MUNI (COS)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 39°C (103°F). DME/DME RNP-0.3 NA. RADAR monitoring required when R-2601 in use.	MISSED APPROACH: Climb to 6600 then climbing right turn to 9000 direct ADANE and hold.
---	---

ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6	CLNC DEL 134.45 363.125
----------------------------	---	-------------------------------------	-------------------------------	-----------------------------------

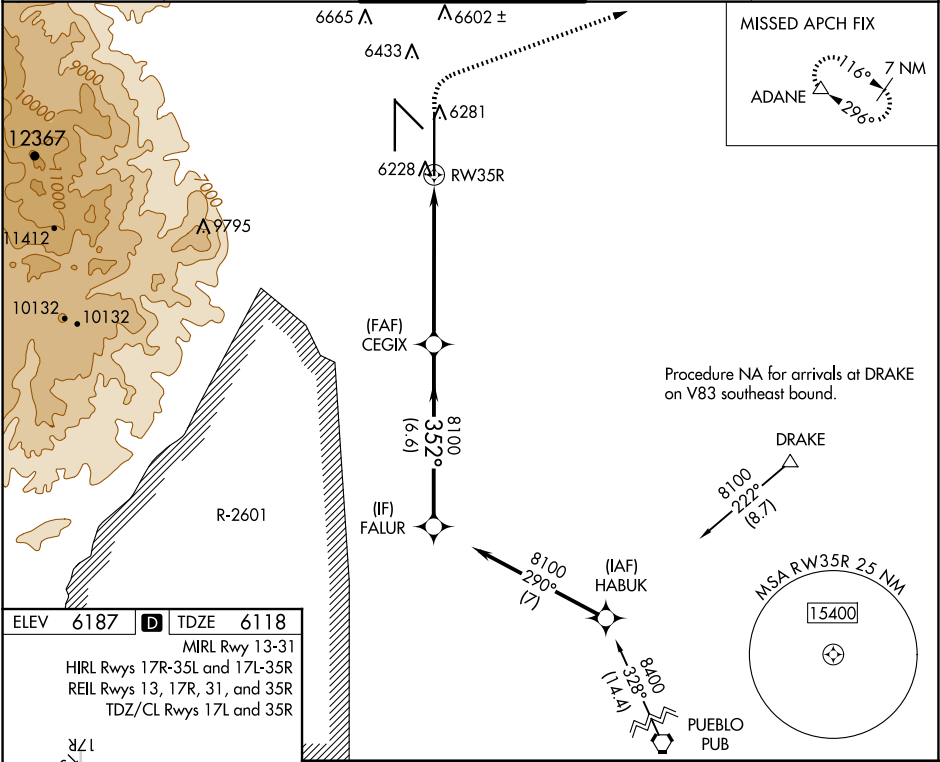

ELEV 6187	D	TDZE 6118
MIRL Rwy 13-31 HIRL Rwys 17R-35L and 17L-35R REIL Rwys 13, 17R, 31, and 35R TDZ/CL Rwys 17L and 35R		

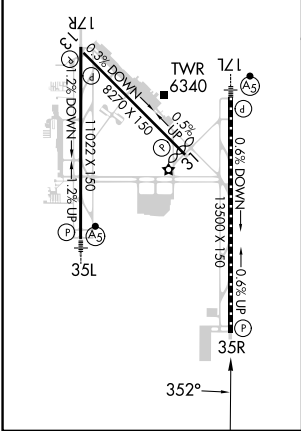

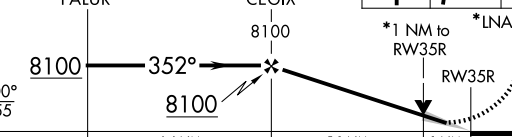VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).				6600 ↑	9000 	ADANE △
						
CATEGORY	A		B	C		D
LPV DA	6318/40		200 (200-¾)			
LNAV/ VNAV DA	6399/45		281 (300-¾)			
LNAV MDA	6500/55	382 (400-1)	6500/60	382 (400-1¼)		
 CIRCLING	6740-1 553 (600-1)	6800-1 613 (700-1)	7040-2½ 853 (900-2½)	7260-3 1073 (1100-3)		