

LOC I-VYK	APP CRS	Rwy Idg	8506
108.3	292°	TDZE	227
		Apt Elev	236

ILS or LOC RWY 29

COLUMBIA METRO (CAE)


⚠

For inop ALS, increase S-ILS 29 Cat E visibility to RVR 4000, and S-LOC 29 Cats C/D/E to 1½ SM.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2300 direct CAE VORTAC and hold, continue climb-in-hold to 2300. (TACAN aircraft continue on CAE VORTAC R-140 to ADCOM INT/10 DME and hold NW, right turn, 140° inbound).

ATIS	COLUMBIA APP CON		COLUMBIA TOWER		GND CON	CNLC DEL
120.15	133.4	285.6	119.5	257.8	121.9 348.6	119.75
	124.15	338.2				
		(110°-289°)				

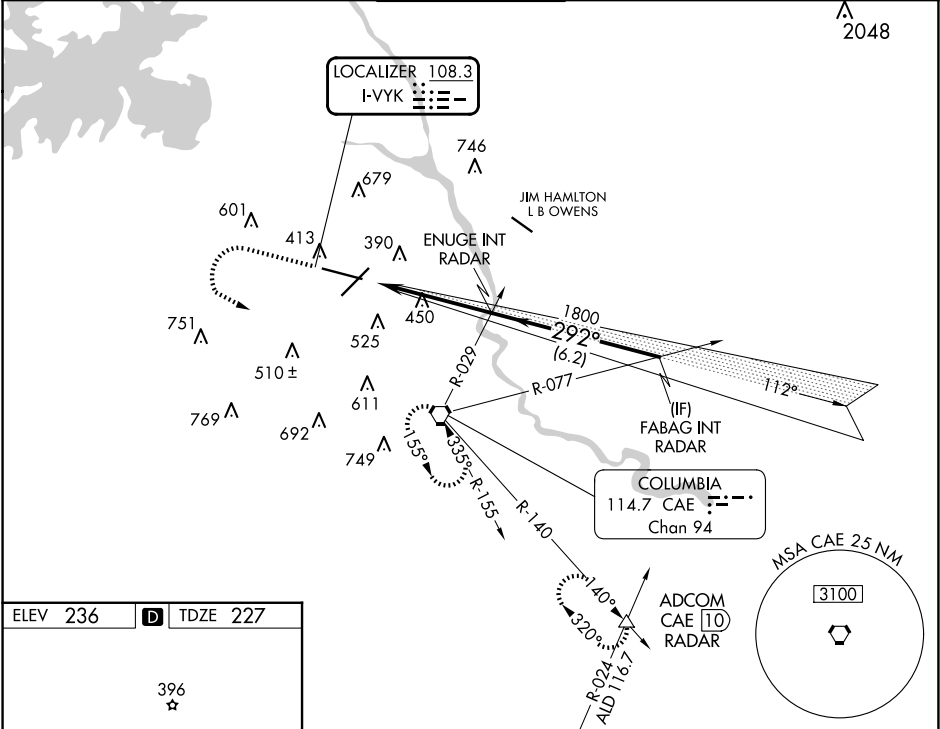

ELEV 236

D

TDZE 227

REIL Rwy 23

TDZ/CL Rwy 11

HIRL Rwy 5-23 and 11-29

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

	1000	2300	CAE		
				ENUG INT RADAR	FABAG INT RADAR
				1800	2500
				292°	GS 3.00°
				1800	TCH 58
				4.8 NM	6.2 NM
CATEGORY	A	B	C	D	E
S-ILS 29*	427/24 200 (200-½)				
S-LOC 29	700/24	473 (500-½)	700/50	473 (500-1)	
CIRCLING	740-1 504 (600-1)	860-1 624 (700-1)	1040-2¼ 804 (900-2¼)	1040-2½ 804 (900-2½)	1040-2¾ 804 (900-2¾)