

WAAS CH 45526 W05A	APP CRS 052°	Rwy Idg 7001 TDZE 228 Apt Elev 236
--	------------------------	---

RNAV (GPS) RWY 5
COLUMBIA METRO (CAE)

RNP APCH - GPS


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below
A -5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats
 visibility to RVR 6000 and LNAV Cats C and D visibility to 1½ SM.
 *RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR



MISSED APPROACH: Climb to 2400
direct POMIE and on track 018° to
BEETY and hold.

ATIS 120.15	COLUMBIA APP CON 133.4 285.6 (290°-109°) 124.15 338.2 (110°-289°)	COLUMBIA TOWER 119.5 257.8	GND CON 121.9 348.6	CLNC DEL 119.75
----------------	---	-------------------------------	------------------------	--------------------

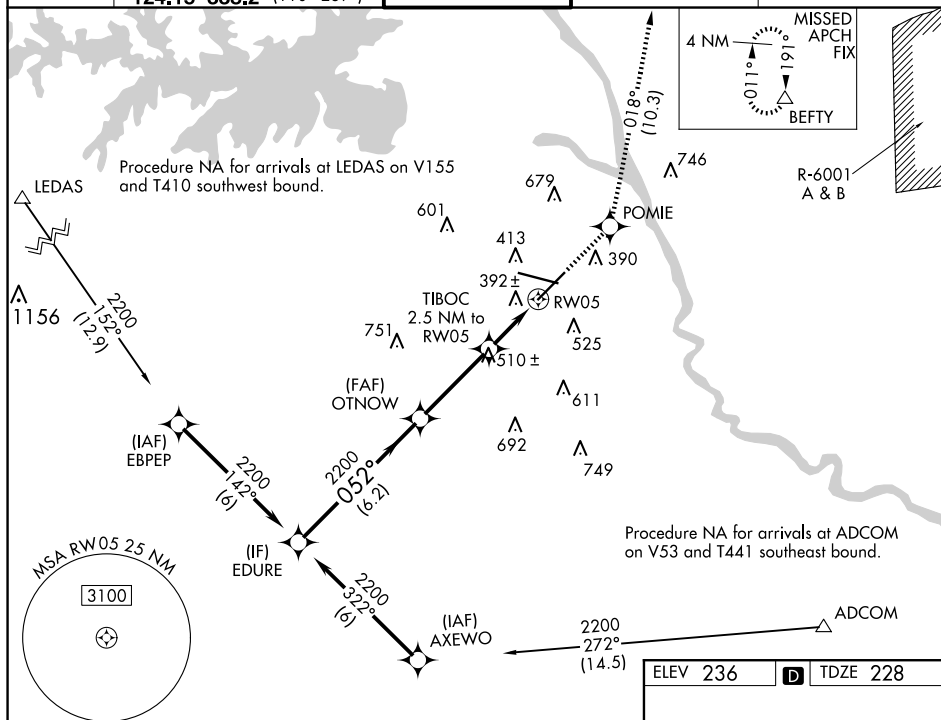

ELEV 236		TDZE 228
----------	---	----------

