


RNAV (GPS) RWY 4

APCH CRS	Rwy Idg	5001
042°	TDZE	17
	Arprt Elev	18

[USN]


CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

RNP APCH		MISSED APPROACH: Climb to 2000 direct FOLEM and hold.	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (129°F)			
ATIS ★ 127.9 290.9	APP CON 128.675 343.75	NAVY CORPUS TOWER ★ 134.85 340.2	GND CON 118.7 257.85
			CLNC DEL 314.3
			ASR/ PAR

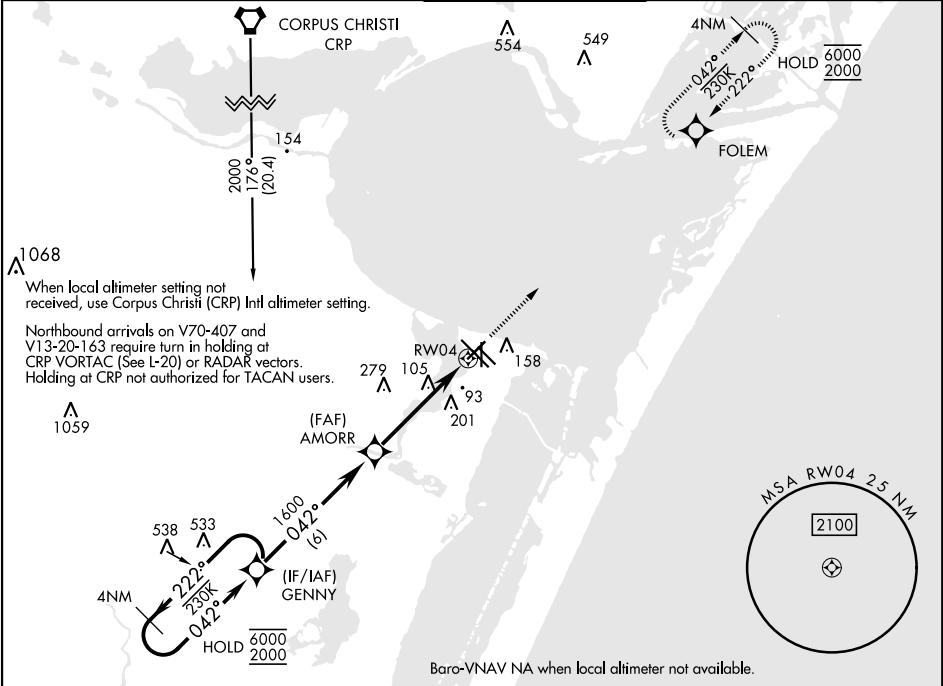

EMERG SAFE ALT 100 NM 11,100

ELEV	18	TDZE	17
------	----	------	----



HIRL Rwy 4-22, 13R-31L
HIRL Rwy 13L-31R, 18-36
REIL Rwy 4-22, 13L-31R, 18-36, 31L

4 NM

Holding Pattern GENNY

6000

2000

222°

042°

GP 3.00°

TCH 50

VDP not authorized when using Corpus Christi (CRP) Intl altimeter setting.

2000

↑

FOLEM

⬡

AMORR

042°

1600

1 NM to RW04

RW04

4.8 NM

CATEGORY	A	B	C	D
LNAV/VNAV DA	267-¾		250	(300-¾)
LNAV MDA	400-1	383 (400-1)	400-1½	383 (400-1½)
C CIRCLING	460-1 442 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½)	580-2 562 (600-2)
CORPUS CHRISTI (CRP) Intl ALTIMETER SETTING				
LNAV MDA	420-1	403 (500-1)	420-1½	403 (500-1½)
C CIRCLING	500-1	482 (500-1)	540-1½ 522 (600-1½)	620-2 602 (700-2)

RNAV (GPS) RWY 4

SC-3, 17 APR 2025 to 15 MAY 2025

SC-3, 17 APR 2025 to 15 MAY 2025