


|         |       |         |          |      |
|---------|-------|---------|----------|------|
| LOC/DME | I-DAL | APP CRS | Rwy Idg  | 7352 |
| 111.5   |       | 133°    | TDZE     | 485  |
| Chan 52 |       |         | Apt Elev | 487  |

ILS or LOC RWY 13L

DALLAS LOVE FLD (DAL)

|                                                                                 |                                   |                                                                                   |                                                                                                                                          |
|---------------------------------------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| RADAR required for procedure entry.                                             |                                   |  | MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 on heading 060° and CVE VOR/DME R-087 to SOLDO INT/CVE 28.9 DME and hold. |
|  | Simultaneous approach authorized. |                                                                                   |                                                                                                                                          |

|                  |                                                                |                           |                         |                   |       |
|------------------|----------------------------------------------------------------|---------------------------|-------------------------|-------------------|-------|
| D-ATIS<br>120.15 | LONE STAR APP CON<br>NORTH 124.3 282.275<br>SOUTH 125.2 343.65 | LOVE TOWER<br>123.7 239.3 | GND CON<br>121.75 348.6 | CLNC DEL<br>127.9 | CPDLC |
|------------------|----------------------------------------------------------------|---------------------------|-------------------------|-------------------|-------|

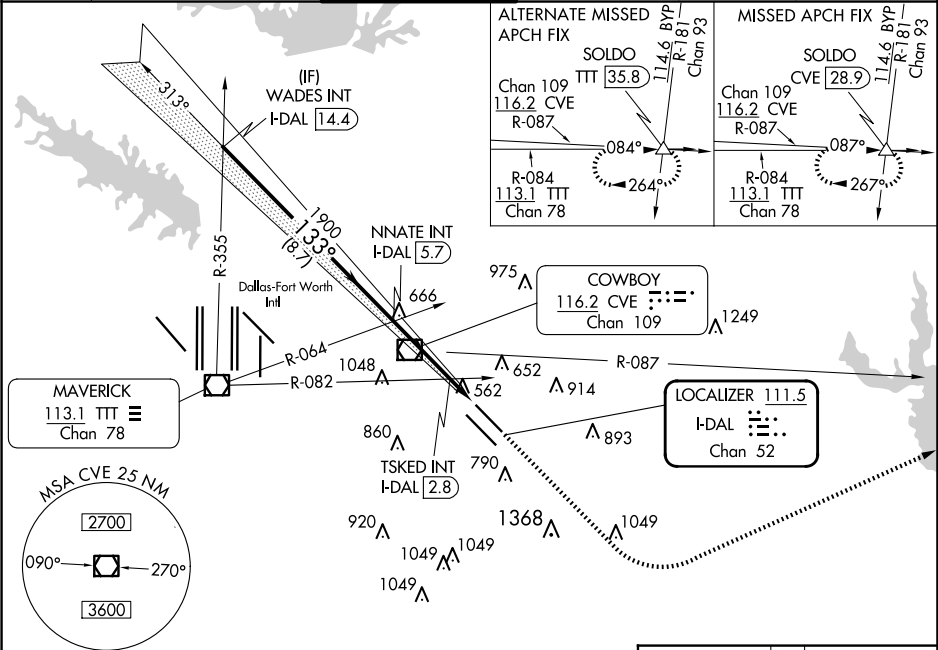

|                                                         |  |                        |  |                        |  |                       |  |                         |  |           |  |                  |  |              |  |            |  |
|---------------------------------------------------------|--|------------------------|--|------------------------|--|-----------------------|--|-------------------------|--|-----------|--|------------------|--|--------------|--|------------|--|
| WADES INT<br>I-DAL 14.4                                 |  | NNATE INT<br>I-DAL 5.7 |  | TSKED INT<br>I-DAL 2.8 |  | I-DAL 2.3             |  | I-DAL 1.4               |  | 1000<br>↑ |  | 3000<br>hdg 060° |  | CVE<br>R-087 |  | SOLDO<br>△ |  |
| 2500                                                    |  | 1900                   |  | 920                    |  |                       |  |                         |  |           |  |                  |  |              |  |            |  |
| GS 3.00°<br>TCH 55                                      |  | 133°                   |  | 1900                   |  | 920                   |  |                         |  |           |  |                  |  |              |  |            |  |
| 8.7 NM                                                  |  | 2.9 NM                 |  | 0.5                    |  | 0.9                   |  |                         |  |           |  |                  |  |              |  |            |  |
| CATEGORY                                                |  | A                      |  | B                      |  | C                     |  | D                       |  |           |  |                  |  |              |  |            |  |
| S-ILS 13L                                               |  | 685/18                 |  | 200 (200-½)            |  |                       |  |                         |  |           |  |                  |  |              |  |            |  |
| S-LOC 13L                                               |  | 920/24                 |  | 435 (500-½)            |  | 920/40                |  | 435 (500-¾)             |  |           |  |                  |  |              |  |            |  |
| CIRCLING                                                |  | 1000-1<br>513 (600-1)  |  | 1140-1<br>653 (700-1)  |  | 1220-2<br>733 (800-2) |  | 1520-3<br>1033 (1100-3) |  |           |  |                  |  |              |  |            |  |
| TSKED FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED) |  |                        |  |                        |  |                       |  |                         |  |           |  |                  |  |              |  |            |  |
| S-LOC 13L                                               |  | 820/24                 |  | 335 (400-½)            |  | 820/26                |  | 335 (400-½)             |  |           |  |                  |  |              |  |            |  |
| CIRCLING                                                |  | 1000-1<br>513 (600-1)  |  | 1140-1<br>653 (700-1)  |  | 1220-2<br>733 (800-2) |  | 1520-3<br>1033 (1100-3) |  |           |  |                  |  |              |  |            |  |

