


APP CRS	Rwy Idg	8310
133°	TDZE	478
	Apt Elev	487

RNAV (RNP) W RWY 13R
DALLAS LOVE FLD (DAL)


⚠ For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). Simultaneous approach authorized. RF required. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 3000 direct ENAVE and on track 151° to TACKE and hold.

D-ATIS 120.15	LONE STAR APP CON NORTH 124.3 282.275 SOUTH 125.2 343.65	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6	CLNC DEL 127.9	CPDLC
------------------	--	---------------------------	-------------------------	-------------------	-------

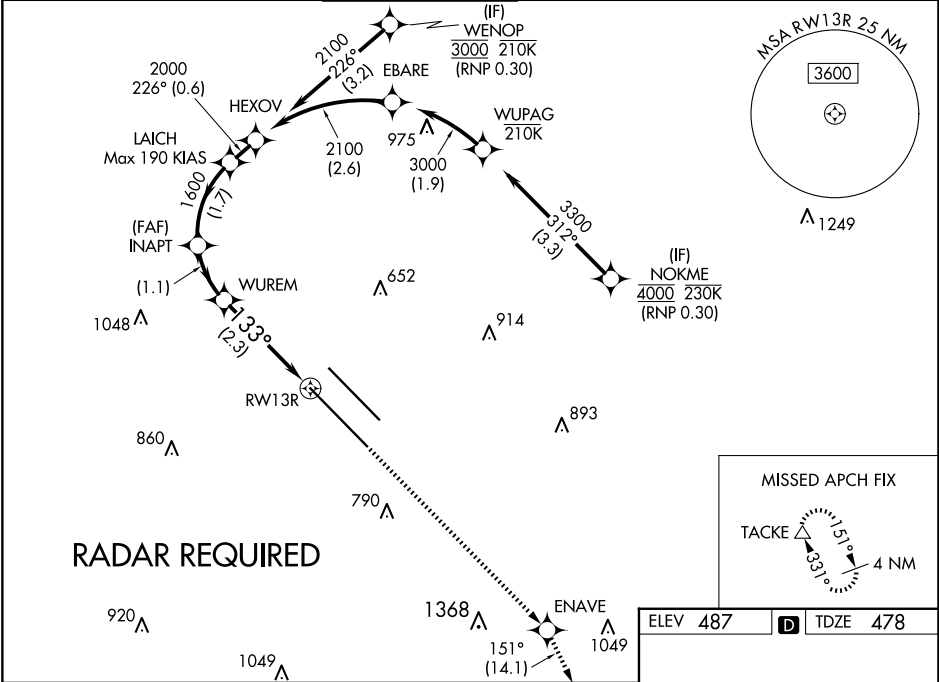

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).				
See planview for multiple IF locations.				
HEXOV	LAICH	INAPT	WUREM	RW13R
2100	2000	1600	1250	
GP 3.00°				
TCH 48				
0.6 NM	1.7 NM	1.1 NM	2.3 NM	
CATEGORY	A	B	C	D
RNP 0.20 DA		781/50	303 (300-1)	
RNP 0.25 DA		833/60	355 (400-1¼)	
RNP 0.30 DA		929-1½	451 (500-1½)	
AUTHORIZATION REQUIRED				

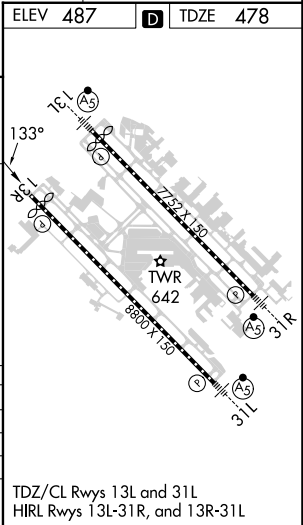

SC-2, 17 APR 2025 to 15 MAY 2025

SC-2, 17 APR 2025 to 15 MAY 2025