


APP CRS	Rwy Idg	10000
036°	TDZE	645
	Apt Elev	645

RNAV (RNP) X RWY 4L

DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.		ALSF-2	MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct DOHNT and hold.		
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.30 DA all Cats visibility to RVR 6000.					
D-ATIS	DETROIT APP CON	METRO TOWER	GND CON	CLNC DEL	CPDLC
133.675	124.05 284.0	135.0 317.725	121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	120.65	

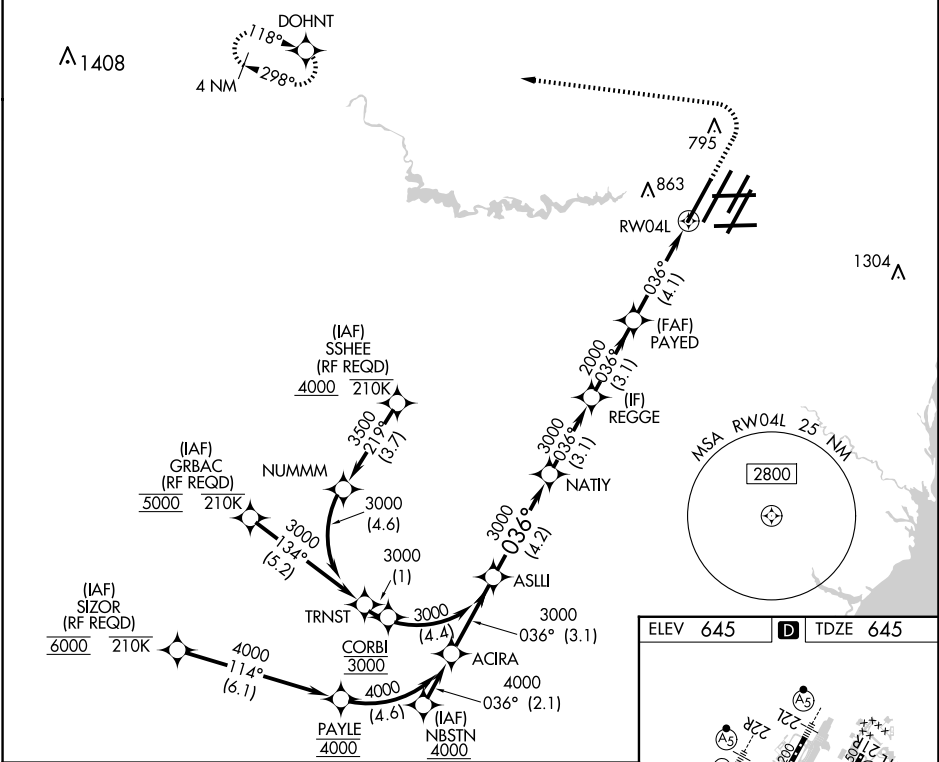

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 71).					1100 4000		DOHNT	
ASLLI NATYI REGGE PAYED RW04L					1100 4000		DOHNT	
3000 036° 3000 3000 2000 2000					1100 4000		DOHNT	
GP 3.00° TCH 55					1100 4000		DOHNT	
4.2 NM 3.1 NM 3.1 NM 4.1 NM					1100 4000		DOHNT	
CATEGORY	A		B		C		D	
RNP 0.15 DA			970/26		325 (400-½)			
RNP 0.30 DA			1058/40		413 (500-¾)			
AUTHORIZATION REQUIRED								

