

APP CRS
042°

Rwy Idg
TDZE
3923

Apt Elev
3962

RNAV (RNP) Y RWY 4


EL PASO INTL (ELP)

RNP AR APCH. RF required.

For uncompensated Baro-VNAV systems, procedure NA below -22°C ASR or above 54°C.

MISSED APPROACH: Climb to 4400 then climbing right turn to 7500 direct FABAN and hold.

D-ATIS 120.0 254.3	EL PASO APP CON 124.25 298.85	EL PASO TOWER 118.3 239.275	GND CON 121.9 348.6	CLNC DEL 125.0 379.1
------------------------------	---	---------------------------------------	-------------------------------	--------------------------------

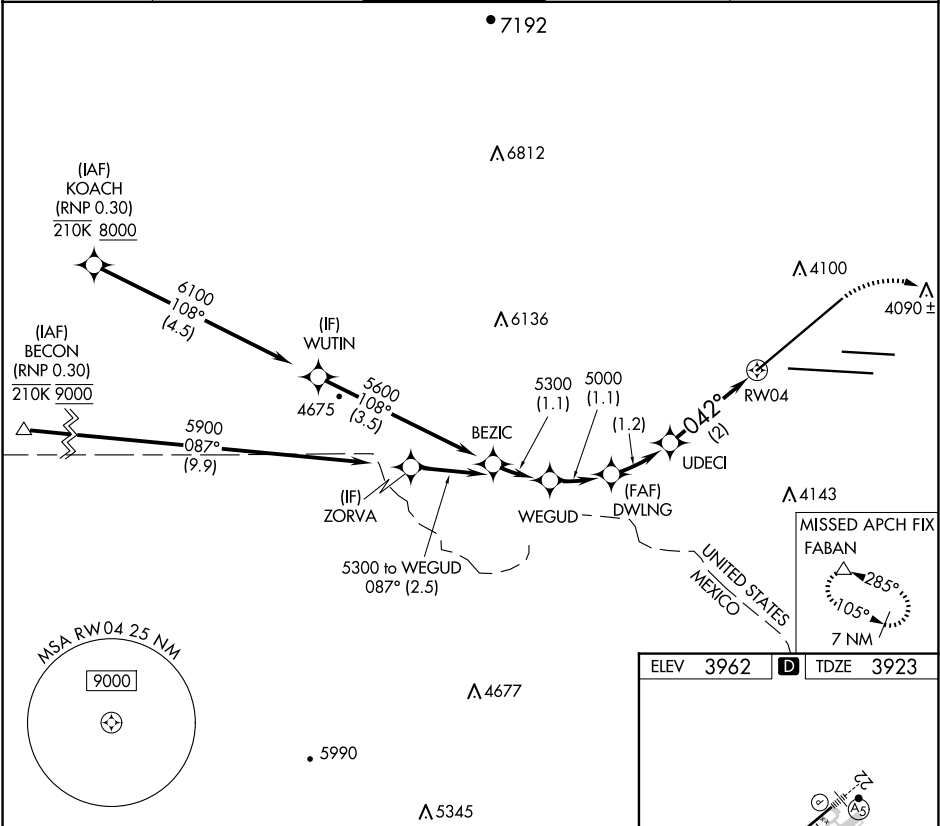

WEGUD

See planview for multiple IF locations.

4400

7500

FABAN

5300

DWLING

5000

UDECI

042°

RW04

GP 3.00°

TCH 55

1.1 NM

1.2 NM

2 NM

CATEGORY	A	B	C	D
RNP 0.20 DA	4271/55		348 (400-1)	
RNP 0.30 DA	4340/60		417 (400-1¼)	

AUTHORIZATION REQUIRED

MIRL Rwy 8L-26R
REIL Rwy 4 and 8R
HIRL Rwy 4-22 and 8R-26L