
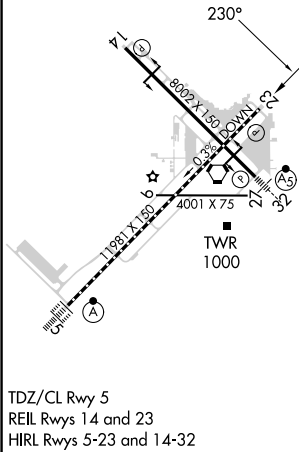


WAAS CH 69599 W23A	APP CRS 230°	Rwy Idg 11981 TDZE 799 Apt Elev 815
--	------------------------	--

RNAV (GPS) RWY 23

FORT WAYNE INTL (FWA)

ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.			MISSED APPROACH: Climb to 3000 direct EBACO and hold.	
ATIS 121.25 360.825	FORT WAYNE APP CON 127.2 284.6	FORT WAYNE TOWER 119.1 269.325	GND CON 121.9 348.6	CLNC DEL 124.75

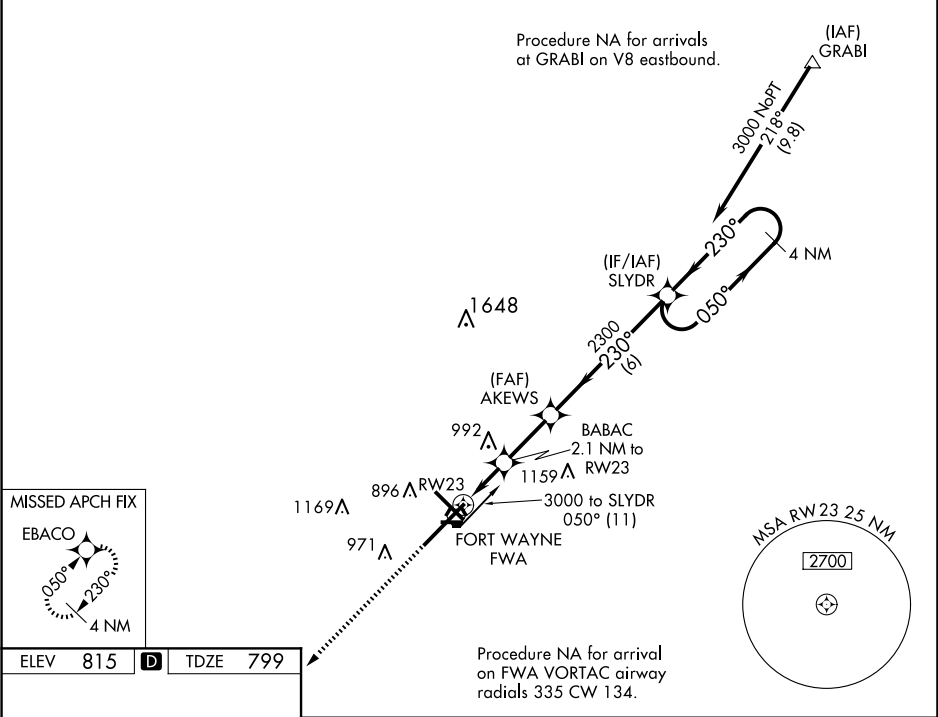

3000 EBACO		VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 76).			
*LNAV only.		BABAC 2.1 NM to RW23	AKEWS 2300	SLYDR 4 NM Holding Pattern	3000
RW23		*1.3 NM to RW23	*1520	2300	GP 3.00° TCH 55
1.3		0.8	2.4 NM	6 NM	
CATEGORY	A	B	C	D	E
LPV DA	1053/40 254 (300-¾)				
LNAV/VNAV DA	1230-1⅜ 431 (500-1⅝)				
LNAV MDA	1300/55 501 (500-1)		1300-1⅜ 501 (500-1⅝)		
C CIRCLING	1300-1 485 (500-1)		1420-1¾ 605 (700-1¾)	1520-2¼ 705 (800-2¼)	1520-2½ 705 (800-2½)

EC-2, 17 APR 2025 to 15 MAY 2025

EC-2, 17 APR 2025 to 15 MAY 2025