

WAAS
CH **53412**
W34A

APP CRS
344°

Rwy Idg **7455**
TDZE **680**
Apt Elev **710**

RNAV (GPS) RWY 34



FORT WORTH MEACHAM INTL (FTW)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALS, increase LNAV/VNAV Cat D and LNAV Cat D visibility to 1½ mile.

MALS

MISSED APPROACH: Climb to 3000 direct WOROD and hold.

ATIS 120.7	LONE STAR APP CON (North) 118.1 306.95 (South) 135.975 379.9	MEACHAM TOWER 118.3 257.8	GND CON 121.9	CLNC DEL 124.65
----------------------	--	-------------------------------------	-------------------------	---------------------------

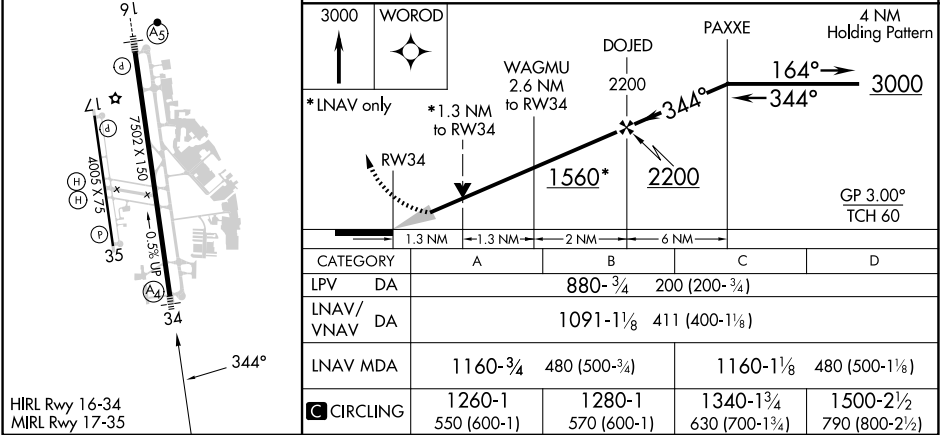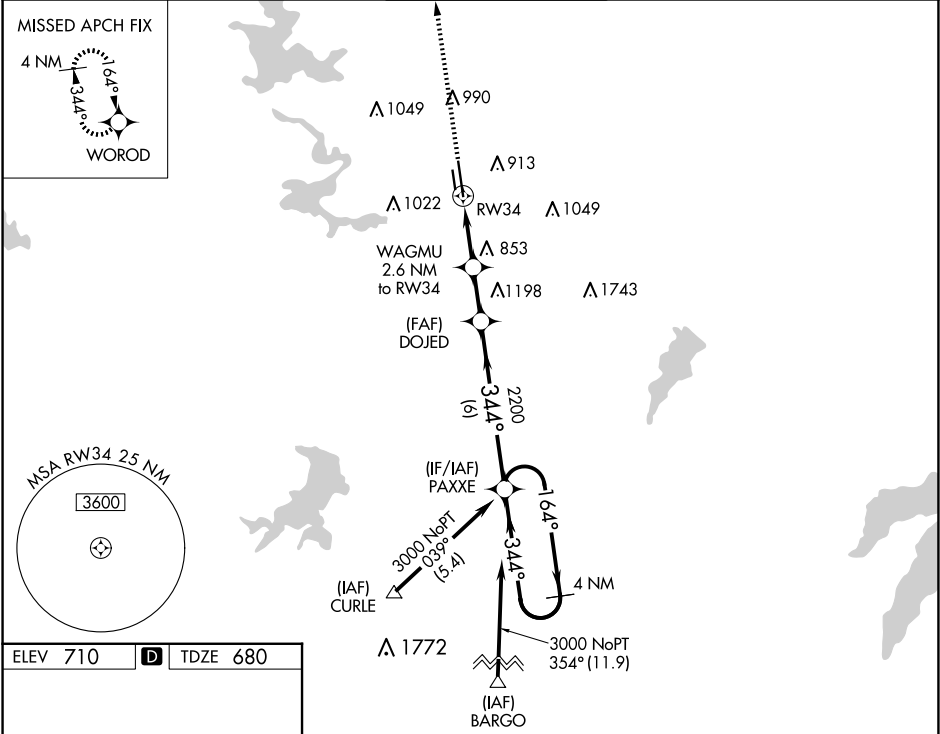

3000

WOROD

*LNAV only

WAGMU 2.6 NM to RW34

DOJED

PAXXE

4 NM Holding Pattern

3000

164°

344°

3000

GP 3.00°

TCH 60

1.3 NM

1.3 NM

2 NM

6 NM

1560*

2200

CATEGORY	A	B	C	D
LPV DA		880-¾	200 (200-¾)	
LNAV/VNAV DA		1091-1½	411 (400-1½)	
LNAV MDA	1160-¾	480 (500-¾)	1160-1½	480 (500-1½)
CIRCLING	1260-1 550 (600-1)	1280-1 570 (600-1)	1340-1¾ 630 (700-1¾)	1500-2½ 790 (800-2½)