



ILS or LOC RWY 28L  
CHICAGO O'HARE INTL (ORD)

ALSF-2

**MISSED APPROACH:** Climb to 1200 then climbing left turn to 4000 direct CGT VORTAC and hold.

**T** Simultaneous approach authorized.

|                            |                                     |                             |                                                                            |                                               |                    |       |
|----------------------------|-------------------------------------|-----------------------------|----------------------------------------------------------------------------|-----------------------------------------------|--------------------|-------|
| D-ATIS<br>135.4<br>282.225 | CHICAGO<br>APP CON<br>119.0 292.125 | O'HARE TOWER<br>133.0 348.0 | GND CON<br>124.125 (TWR NORTH)<br>118.05 (TWR SOUTH)<br>226.675 (ALL TWRs) | (TWR CENTER)<br>121.75 (IBND)<br>121.9 (IBND) | CLINC DEL<br>121.6 | CPDLC |
|----------------------------|-------------------------------------|-----------------------------|----------------------------------------------------------------------------|-----------------------------------------------|--------------------|-------|

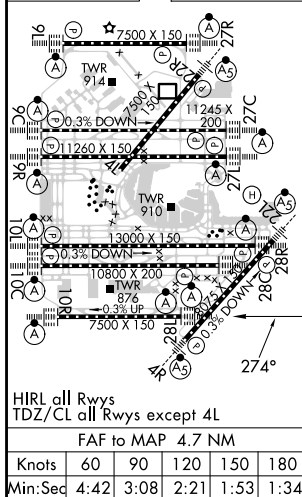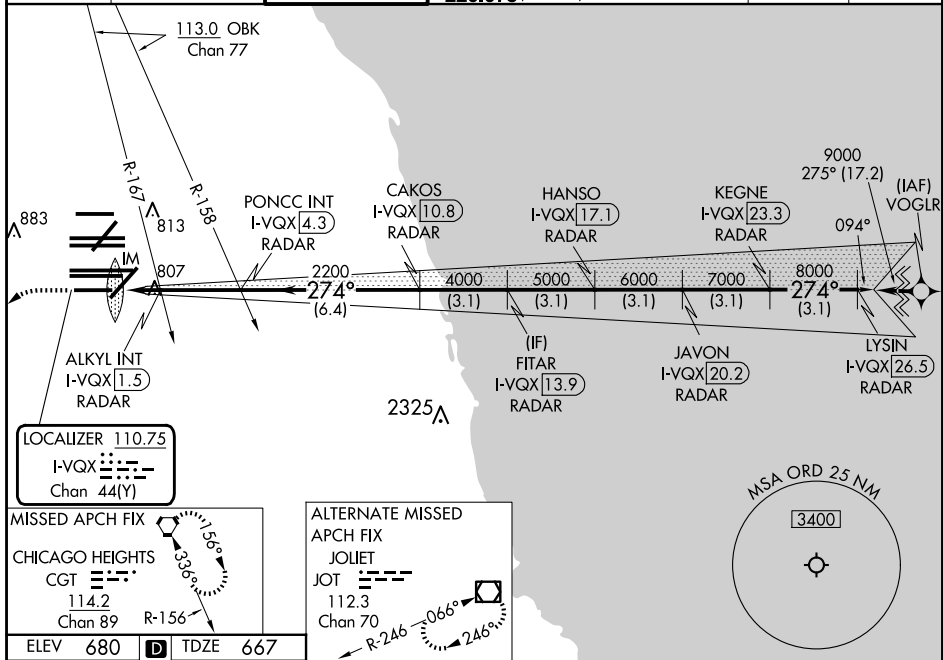

|                                                         |           |                                                                                            |                             |                          |                          |                      |                          |      |                          |      |      |  |
|---------------------------------------------------------|-----------|--------------------------------------------------------------------------------------------|-----------------------------|--------------------------|--------------------------|----------------------|--------------------------|------|--------------------------|------|------|--|
| 1200<br>↑                                               | 4000<br>↖ | CGT<br> | *LOC only.                  |                          |                          |                      |                          |      |                          |      |      |  |
| I-VQX DME ANTENNA                                       |           | ALKYL INT I-VQX [1.5] RADAR                                                                | PONCC INT I-VQX [4.3] RADAR |                          | FITAR I-VQX [13.9] RADAR |                      | JAVON I-VQX [20.2] RADAR |      | LYSIN I-VQX [26.5] RADAR |      |      |  |
| I-VQX [0.3] IM                                          |           | *I-VQX [0.8]                                                                               | 2200                        | CAKOS I-VQX [10.8] RADAR | HANSO I-VQX [17.1] RADAR |                      | KEGNE I-VQX [23.3] RADAR |      |                          |      |      |  |
| 0.2                                                     |           | 0.9                                                                                        | 0.7                         | 2.9 NM                   | 6.4 NM                   | 4000                 | 5000                     | 6000 | 7000                     | 8000 | 9000 |  |
| CATEGORY                                                |           | A                                                                                          |                             | B                        |                          | C                    |                          | D    |                          |      |      |  |
| S-ILS 28L                                               |           | 867/18 200 (200-½)                                                                         |                             |                          |                          |                      |                          |      |                          |      |      |  |
| S-LOC 28L                                               |           | 1240/24 573 (600-½)                                                                        |                             |                          |                          | 1240-1¼ 573 (600-1¼) |                          |      |                          |      |      |  |
| ALKYL FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED) |           |                                                                                            |                             |                          |                          |                      |                          |      |                          |      |      |  |
| S-LOC 28L                                               |           | 1060/24 393 (400-½)                                                                        |                             |                          |                          | 1060/35 393 (400-¾)  |                          |      |                          |      |      |  |