


LOC/DME I-JAV 110.5 Chan 42	APP CRS 093°	Rwy Idg 11260 TDZE 668 Apt Elev 680
---	------------------------	--

ILS or LOC RWY 9R
CHICAGO O'HARE INTL (ORD)

RNP APCH-GPS from GIBNS.	ALSIF-2	MISSED APPROACH: Climb to 1200 then climb to 4000 on heading 085° and OBK VOR/DME R-124 to GRABL INT/OBK 26.9 DME/RADAR and hold.
Aircraft not GPS equipped - RADAR required for procedure entry. RADAR or DME required.		
Simultaneous approach authorized. For inop ALS, increase S-LOC 9R Cat C/D visibility to 2 SM.		

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 126.9 348.0	GND CON (TWR NORTH) 124.125 (TWR SOUTH) 118.05 (ALL TWRs) 226.675	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC
--	---	------------------------------------	---	---	--------------------------	-------

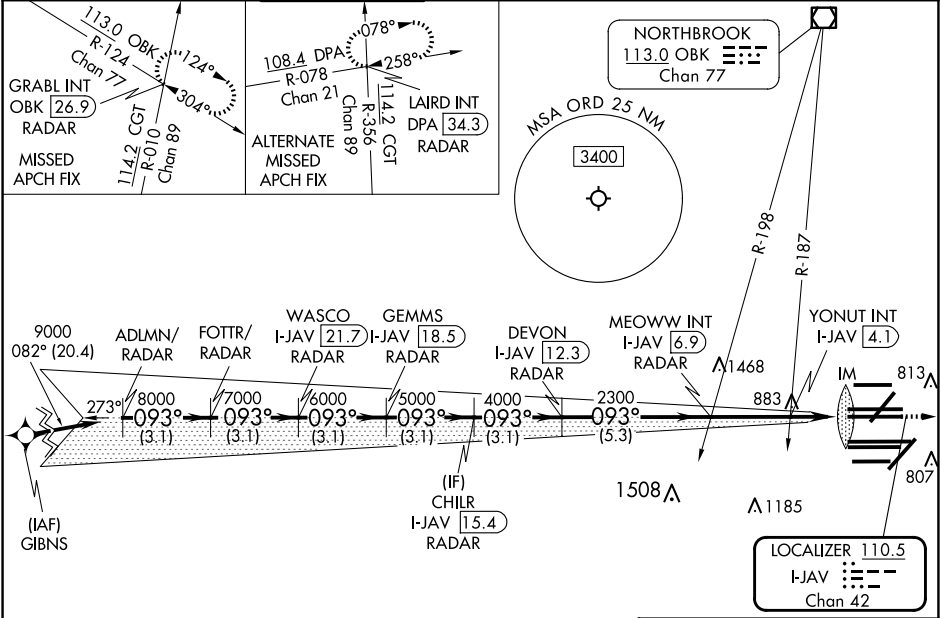

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 76).										1200	4000	OBK R-124	GRABL INT
ADLMN/ RADAR	FOTTR/ RADAR		WASCO I-JAV (21.7)	GEMMS I-JAV (18.5)		CHILR I-JAV (15.4)	MEOWW INT I-JAV (6.9)	YONUT INT I-JAV (4.1)		IM I-JAV (2)			
9000	8000	7000	6000	5000	4000	2300	1380						
GS 3.00° TCH 58	3.1 NM	3.1 NM	3.1 NM	3.1 NM	3.1 NM	5.3 NM	2.8 NM	0.9 NM	1.2 NM				
CATEGORY	A		B		C		D						
S-ILS 9R	868/18					200 (200-½)							
S-LOC 9R	1380/24		712 (700-½)		1380-1½		712 (700-½)						
YONUT FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)													
S-LOC 9R	1120/24		452 (500-½)		1120/45		452 (500-¾)						

