

LOC/DME I-BQE 108.7 Chan 24	APP CRS 252°	Rwy Idg 10599 TDZE 678 Apt Elev 684
---	------------------------	--

ILS Z or LOC Z RWY 25
EUGENE F KRANZ TOLEDO EXPRESS (TOL)

RADAR required for procedure entry. DME, RNAV 1-GPS required.

T For inop ALS, increase S-ILS 25 Cat E visibility to RVR 4000, and S-LOC 25
A Cat E visibility to RVR 5000.


* RVR 1800' authorized with use of FD or AP or HUD to DA.

MALSR




MISSED APPROACH: Climb to 1100 then climbing left turn to 2500 direct WUPTA and hold.

ATIS	TOLEDO APP CON	TOLEDO TOWER	GND CON	CLNC DEL
118.75 290.225	134.35 317.55	118.1 285.4	121.9 348.6	121.75 348.6

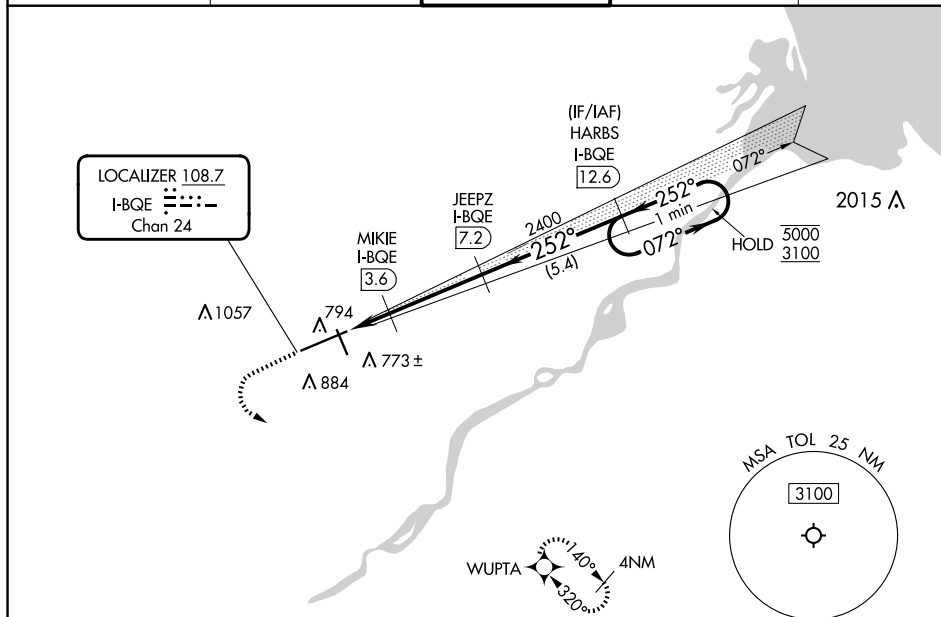

ELEV 684	D	TDZE 678
----------	----------	----------



TDZ/CL Rwy 7
HIRL Rwy 7-25
MIRL Rwy 16-34
REIL Rwy 16 and 34

1100 ↑	2500 ↖	WUPTA ✦	VGSJ and ILS glidepath not coincident (VGSJ Angle 3.00/TCH 69).				One Minute Holding Pattern	
CATEGORY	A		B		C	D	E	
S-ILS 25 *	878/24 200 (200-½)							
S-LOC 25	1000/24 322 (400-½)				1000/26 322 (400-½)			
C CIRCLING	1200-1 516 (600-1)		1300-1¾ 616 (700-1¾)		1360-2¼ 676 (700-2¼)	1360-2½ 676 (700-2½)		