



VORTAC LNK 116.1 Chan 108	APP CRS 185°	Rwy Idg 12901 TDZE 1195 Apt Elev 1219
---	------------------------	--

VOR Y RWY 18

LINCOLN (LNK)

▼ ▲ Inop table does not apply. VDP NA when using Beatrice altimeter setting. When local altimeter setting not received, use Beatrice altimeter setting and increase all MDA 100 feet; increase 5-18 all Cats visibility ¼ SM and Circling Cat C/D visibilities ¼ SM.	MALSR AS	MISSED APPROACH: Climb to 2800 then climbing left turn to 3100 direct LNK VORTAC and hold.
---	---	--

ATIS 118.05 290.9	OMAHA APP CON 124.0 270.3	LINCOLN TOWER★ 118.5(CTAF) 253.5	GND CON 121.9 275.8	CLNC DEL 120.7 225.4	UNICOM 122.95
-----------------------------	-------------------------------------	--	-------------------------------	--------------------------------	-------------------------

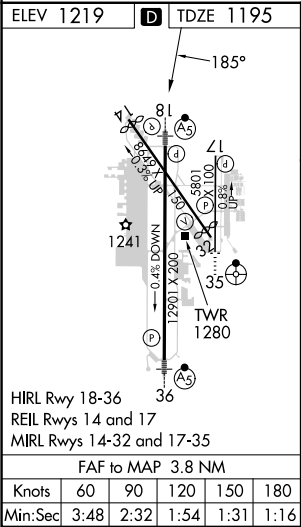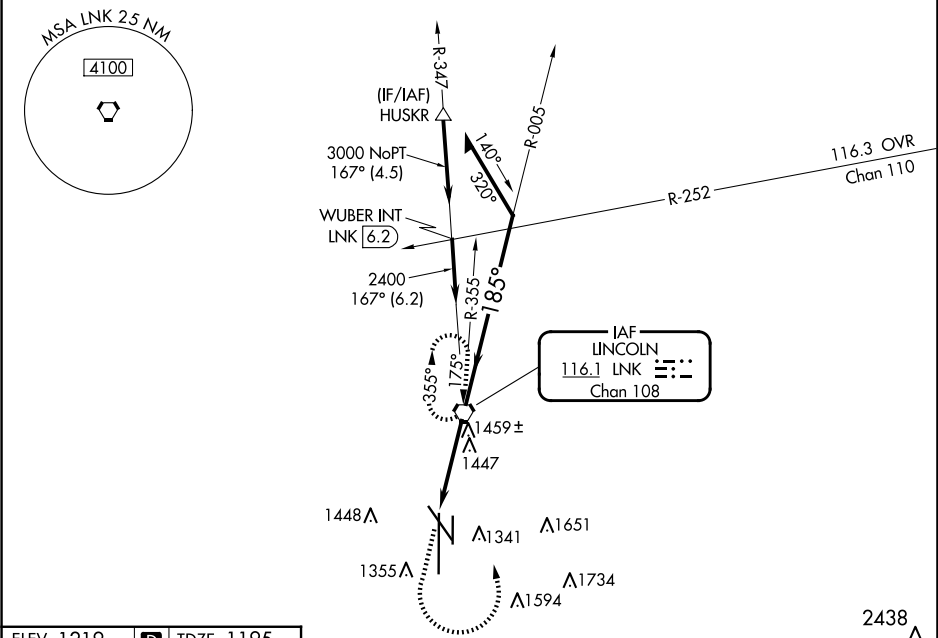

2800 3100 LNK				LNK VORTAC				Remain within 10 NM	
LNK 3.8 LNK 2.3 ≤ 2.89° TCH 55				LNK 3.8 LNK 2.3 ≤ 2.89° TCH 55				2400	
1.5 NM				2.3 NM					
CATEGORY	A		B		C		D		
S-18	1720/55		525 (600-1)		1720-1½		525 (600-1½)		
CIRCLING	1720-1 501 (600-1)		1760-1 541 (600-1)		1820-1¾ 601 (700-1¾)		1960-2½ 741 (800-2½)		