

|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Idg  | 8566 |
| 071°    | TDZE     | 119  |
|         | Apt Elev | 128  |

RNAV (RNP) Z RWY 6L  
LOS ANGELES INTL (LAX)


**7**

For uncompensated Baro-VNAV systems, procedure NA below 5°C (41°F) or above 54°C (130°F). Simultaneous approach authorized. GPS required. For inop MALSR, increase RNP 0.30 all Cats visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 3000 on track 071° to ZANAV and on track 042° to AMTRA and hold.

|            |               |                   |                |          |       |
|------------|---------------|-------------------|----------------|----------|-------|
| D-ATIS     | SOCAL APP CON | LOS ANGELES TOWER | GND CON        | CLNC DEL | CPDLC |
| ARR 133.8  | 124.3 363.2   | N 133.9 239.3     | N 121.65 327.0 | 120.35   |       |
| DEP 135.65 | 124.5 235.975 | S 120.95 379.1    | S 121.75 327.0 | 327.0    |       |
|            | (225°-044°)   | (090°-224°)       | W 121.4 327.0  |          |       |
|            |               | (045°-089°)       |                |          |       |

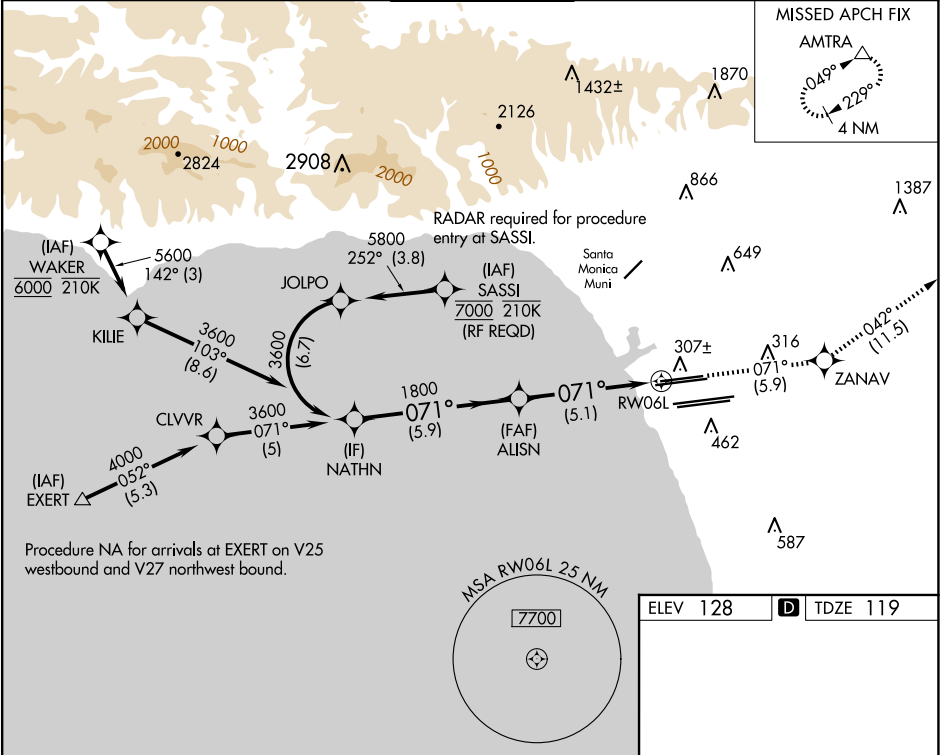

Procedure NA for arrivals at EXERT on V25 westbound and V27 northwest bound.

MSA RW06L 25 NM

7700

|                                                                  |                    |         |         |       |
|------------------------------------------------------------------|--------------------|---------|---------|-------|
| VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 77). |                    | 3000    | ZANAV   | AMTRA |
| NATHN                                                            |                    | ↑       |         | △     |
| 3600                                                             |                    | tr 071° | tr 042° |       |
| GP 3.00°                                                         |                    |         |         |       |
| TCH 55                                                           |                    |         |         |       |
| 5.9 NM                                                           |                    | 5.1 NM  |         |       |
| CATEGORY                                                         | A                  | B       | C       | D     |
| RNP 0.30 DA                                                      | 484/40 365 (400-¾) |         |         |       |
| AUTHORIZATION REQUIRED                                           |                    |         |         |       |
| TDZ/CL Rwy 6R, 7L, 24R, and 25L<br>HIRL all Rwy                  |                    |         |         |       |

SW-3, 17 APR 2025 to 15 MAY 2025

SW-3, 17 APR 2025 to 15 MAY 2025