

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 42522 W18A | APP CRS 185° | Rwy Idg TDZE Apt Elev | 8606 864 887 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 18




DANE COUNTY RGNL/TRUAX FLD (MSN)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F), DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1 3/8 mile and LNAV Cat C/D visibility to 1 3/8 miles.
**** RVR 1800 authorized with use of FD or AP or HUD to DA.**





MISSED APPROACH:
Climb to 3000 direct DEKEY and hold.

| | | | | | |
|-----------------------------|--|--|-------------------------------|----------------------------|-------------------------|
| ATIS 124.65 278.3 | MADISON APP CON * 135.45 343.7 | MADISON TOWER * 119.3 (CTAF) 0 257.8 | GND CON 121.9 348.6 | CLNC DEL 121.625 | UNICOM 122.95 |
|-----------------------------|--|--|-------------------------------|----------------------------|-------------------------|

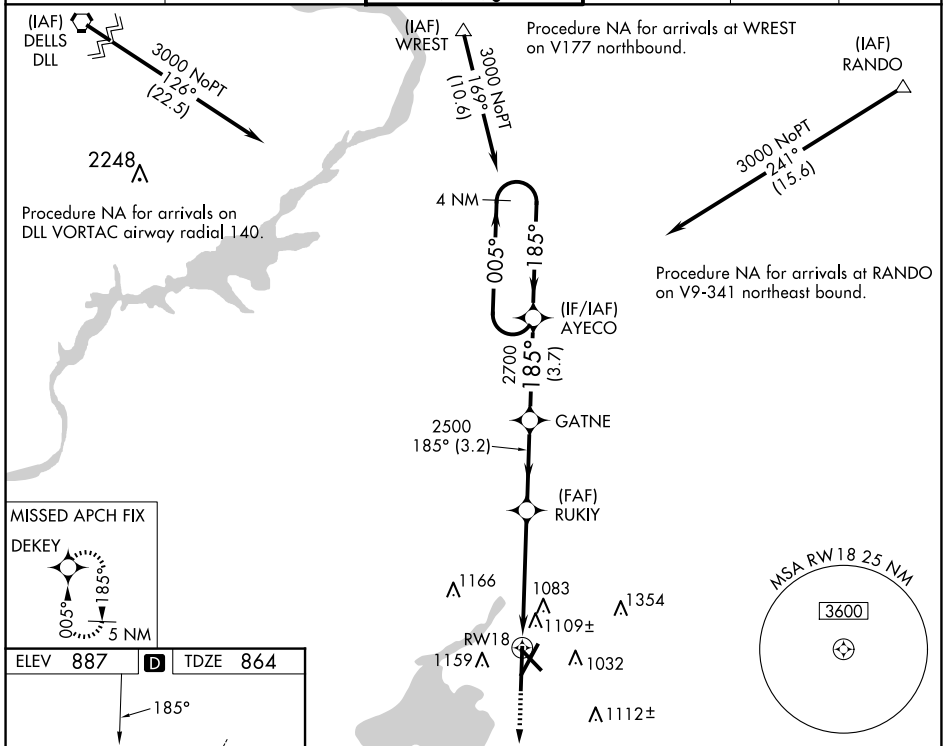

| | | |
|-----------------|----------|-----------------|
| ELEV 887 | D | TDZE 864 |
|-----------------|----------|-----------------|

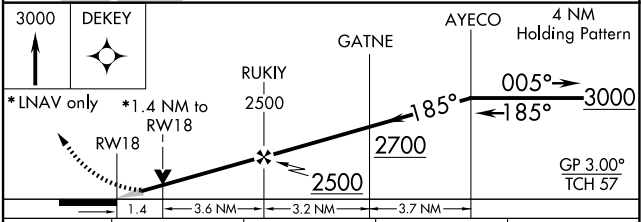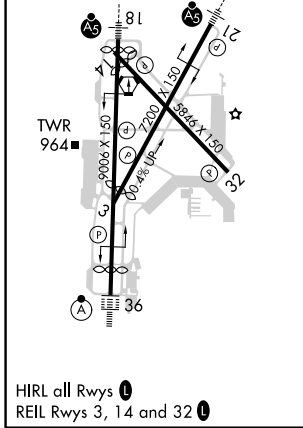

| CATEGORY | A | B | C | D |
|-------------------|----------------------------|-----------------------|-------------------------------|-------------------------------|
| LPV DA ** | 1064/24 200 (200-1/2) | | | |
| LNAV/VNAV DA | 1360-1 1/4 496 (500-1 1/4) | | | |
| LNAV MDA | 1360/24 | 496 (500-1/2) | 1360/55 | 496 (500-1) |
| C CIRCLING | 1420-1 533 (600-1) | 1460-1 573 (600-1) | 1460-1 1/2 573 (600-1 1/2) | 1700-2 3/4 813 (900-2 3/4) |

EC-3, 17 APR 2025 to 15 MAY 2025

EC-3, 17 APR 2025 to 15 MAY 2025