

WAAS CH 77603 W09A	APP CRS 089°	Rwy Idg 8175 TDZE 857 Apt Elev 869
--	------------------------	---

RNAV (GPS) RWY 9

THE EASTERN IOWA (CID)


⚠ Baro-VNAV NA when using Iowa City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Iowa City altimeter setting: increase LPV DA to 1121 feet; increase LNAV/VNAV DA to 1268 feet and all visibilities to RVR 5000; increase all MDA 80 feet, LNAV Cat C visibility to RVR 4000, and Circling Cat C and D visibility ¼ SM. For inop MALS/R increase LNAV Cat D visibility to RVR 6000. VDP NA with Iowa City altimeter setting. When using Iowa City altimeter setting, for inoperative MALS/R, increase LPV all Cats visibility to RVR 5000, LNAV Cat C visibility to RVR 6000 and LNAV Cat D visibility to 1½ miles.
RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Iowa City altimeter setting.

A5

MISSED APPROACH.
Climb to 2700 direct
JUTUS and hold.


ATIS 124.15	CEDAR RAPIDS APP CON ★ 119.7 266.8	CEDAR RAPIDS TOWER ★ 118.7 (CTAF) 0 266.8	GND CON 121.6	CLNC DEL 125.45	UNICOM 122.95
-----------------------	--	---	-------------------------	---------------------------	-------------------------

Procedure NA for arrival at VINTY
on V67 northwest bound.

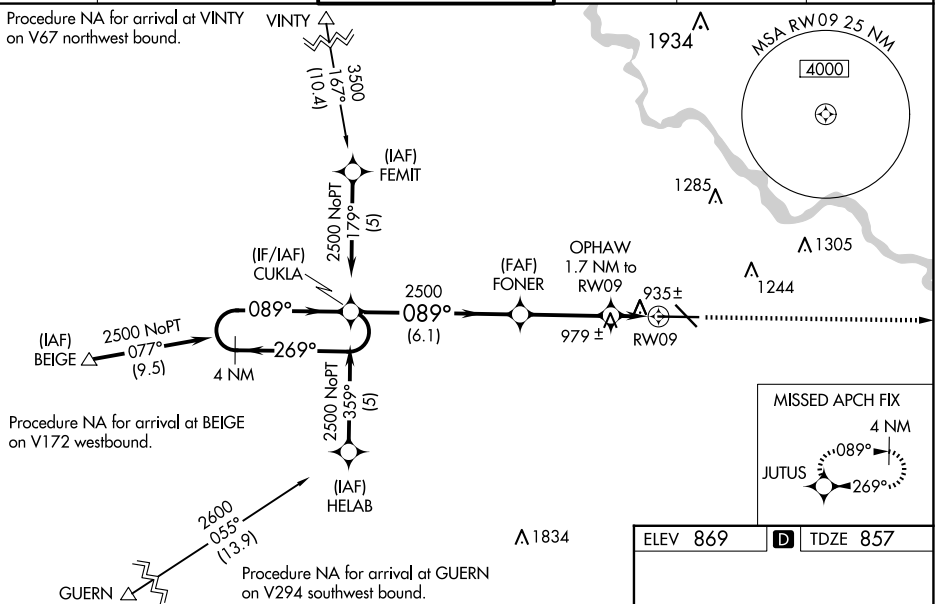

Procedure NA for arrival at BEIGE
on V172 westbound.

GUERN Procedure NA for arrival at GUERN on V294 southwest bound.

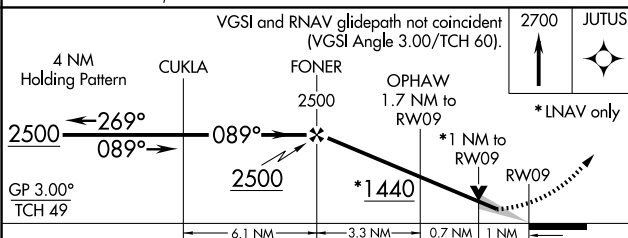

CATEGORY	A	B	C	D
LPV DA#	1057/24 200 (200-½)			
LNAV/ VNAV DA	1204/40 347 (400-¾)			
LNAV MDA	1240/24 383 (400-½)			1240/50 383(400-1)
CIRCLING	1280-1 411 (500-1)	1320-1 451 (500-1)	1560-2 691 (700-2)	1560-2¼ 691 (700-2¼)

MIRL Rwy 13-31 **L**
HIRL Rwy 9-27 **L**
REIL Rwy 13

