

LOC/DME I-EXS 111.15 Chan 48 (Y)	APP CRS 180°	Rwy Idg TDZE Apt Elev	9000 301 341
--	------------------------	-----------------------------	---

ILS or LOC RWY 18L
MEMPHIS INTL (MEM)


Simultaneous approach authorized. DME or RADAR required.
For inop ALS, increase S-ILS 18L Cat E visibility to RVR 4000,
S-LOC 18L Cat E visibility to 1 3/4 SM, BRYSN fix minimums,
increase S-LOC 18L Cats D and E visibility to RVR 5000.

MALSR


MISSED APPROACH: Climb to 900 then
climbing left turn to 5000 on MEM VORTAC
R-151 to KEEZE INT/MEM 10.4 DME and
hold, continue climb-in-hold to 5000.

MEMPHIS APP CON		MEMPHIS TOWER		GND CON	
119.1	291.6	(Rwy 9-27)	118.3 257.8	(Rwy 9-27)	121.0 379.2
125.8	338.3	(Rwys 18C-36C, 18L-36R)	119.7 257.8	(Rwys 18C-36C, 18L-36R)	121.9 379.2
		(Rwy 18R-36L)	128.425 257.8	(Rwy 18R-36L)	121.65 379.2


D-ATIS 127.75	CLNC DEL 125.2	CPDLC
-------------------------	--------------------------	-------

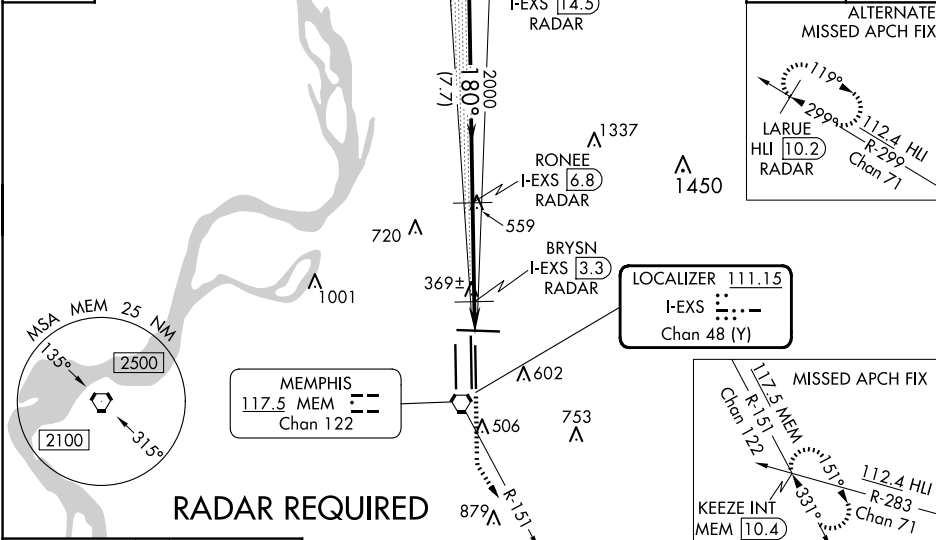

ELEV 341	TDZE 301
----------	----------

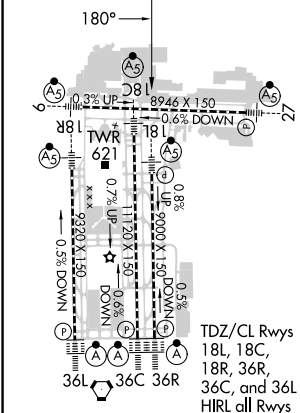

FAF to MAP 5.2 NM				
Knots	60	90	120	150
Min:Sec	5:12	3:28	2:36	2:05

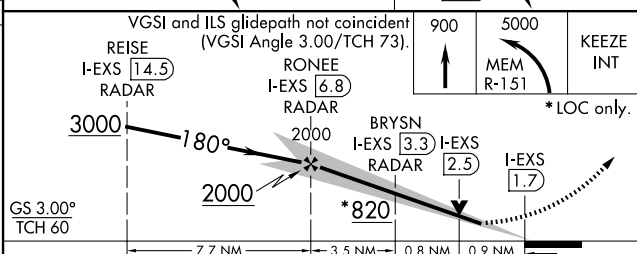

CATEGORY	A	B	C	D	E
S-ILS 18L	501/18 200 (200-1/2)				501/24 200 (200-1/2)
S-LOC 18L	820/24 519 (500-1/2)	820/50 519 (500-1)	820/60 519 (500-1 1/4)		
CIRCLING	940-1 599 (600-1)	940-1 1/2 599 (600-1 1/2)	1020-2 1/4 679 (700-2 1/4)	1140-2 3/4 799 (800-2 3/4)	
BRYSN FIX MINIMUMS					
S-LOC 18L	620/24 319 (300-1/2)	620/40 319 (300-3/4)			
CIRCLING	940-1 599 (600-1)	940-1 1/2 599 (600-1 1/2)	1020-2 1/4 679 (700-2 1/4)	1140-2 3/4 799 (800-2 3/4)	

MEMPHIS INTL (MEM)
ILS or LOC RWY 18L

SE-1, 17 APR 2025 to 15 MAY 2025

SE-1, 17 APR 2025 to 15 MAY 2025