

LOC/DME I-BAO 111.5 Chan 52	APP CRS 326°	Rwy Idg TDZE Apt Elev	6109 704 705
--	------------------------	-----------------------------	---


ILS or LOC RWY 32
ST PAUL DOWNTOWN HOLMAN FLD (STP)

DME or RADAR required. RADAR required for procedure entry.


MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 on heading 010° and MSP R-037 to WHISK INT/MSP 18.7 DME/RADAR and hold.

⚠ Rwy 32 helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to S-ILS 32 all Cats and S-LOC all Cats. HOVIN fix minimums: Inop table does not apply to Cats A/B. For inop ALS, increase Cats C/D visibility to 1 ½ SM.
⊖ -30°C

ATIS 118.35	MINNEAPOLIS APP CON 121.2 335.65	ST. PAUL TOWER * 119.1 (CTAF) 0 257.8	GND CON 121.675	CLNC DEL 121.675	UNICOM 122.95
-----------------------	--	---	---------------------------	----------------------------	-------------------------

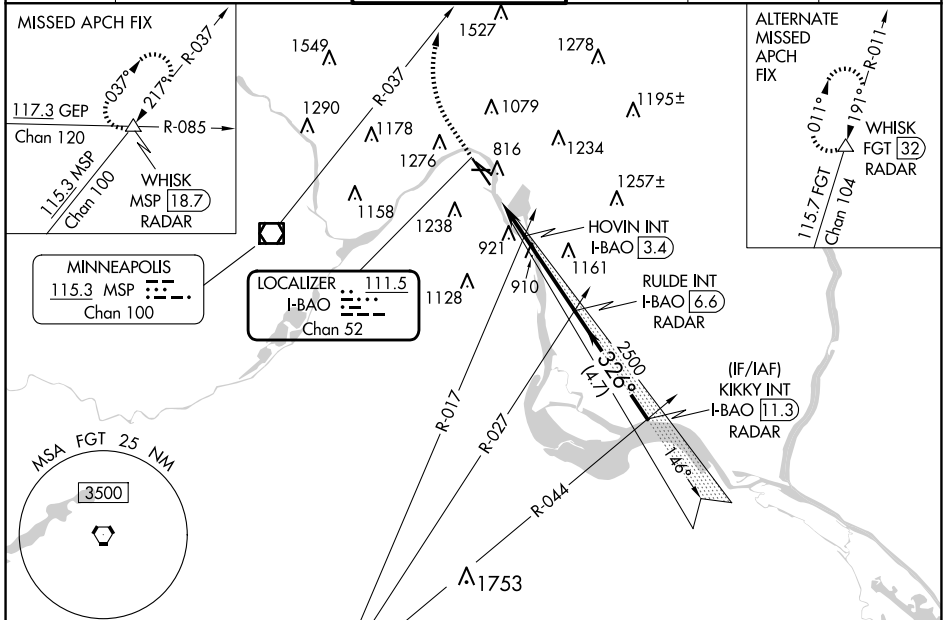

ELEV 705	D	TDZE 704
----------	----------	----------

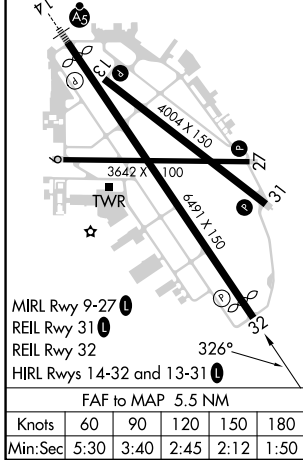

1300	4000	MSP R-037	WHISK	RULDE INT I-BAO 6.6	KIKKY INT I-BAO 11.3
↑	hdg 010°		△	RADAR	RADAR
*LOC only		I-BAO 1.1	*I-BAO 2.6	HOVIN INT I-BAO 3.4	2500
					326°
					2500
					GS 3.00°
					TCH 40
		1.5 NM	0.8 NM	3.2 NM	4.7 NM
CATEGORY	A	B	C	D	
S-ILS 32	1011/50 307 (400-1)				
S-LOC 32	1460/55 756 (800-1)	1460/60 756 (800-1¼)	1460-2	756 (800-2)	
C CIRCLING	1580-1¼	875 (900-1¼)	1580-2½	875 (900-2½)	
HOVIN FIX MINIMUMS					
S-LOC 32	1220/55	516 (600-1)	1220-1¼	516 (600-1¼)	
C CIRCLING	1580-1¼	875 (900-1¼)	1580-2½	875 (900-2½)	