

APP CRS	Rwy Idg	9501
117°	TDZE	3200
	Apt Elev	3206

RNAV (RNP) Z RWY 12

MISSOULA MONTANA (MISO)

RNP AR APCH.



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21° C (-6°F) or above 43°C (109°F).



For inop ALS, increase RNP 0.12 all Cats visibility to RVR 6000. For inop ALS, increase RNP 0.30 all Cats visibility to 2½ SM. When local weather not received, procedure NA.

MALS




15

MISSED APPROACH: Climb to 13000 on track 117° to OKASE and on track 123° to TAGOE and hold, continue climb-in-hold to 13000.

*Missed approach requires minimum climb of 350 feet per NM to 8300; if unable to meet climb gradient, see RNAV (GPS) Y RWY 12.


#Missed approach requires minimum climb of 425 feet per NM to 8300.

ATIS	SPOKANE APP CON*	MISSOULA TOWER*	GND CON	UNICOM
126.65	124.9 298.95	118.4 (CTAF) 0 377.175	121.9	122.95

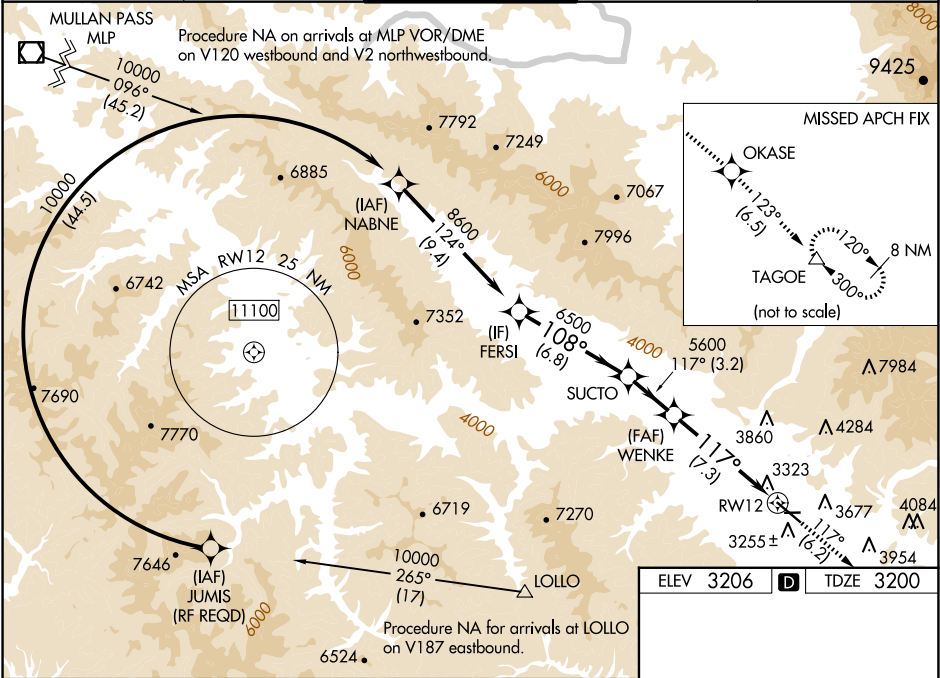

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 55).					13000 ↑ tr 117°	OKASE 	tr 123°	TAGOE △
FERSI	SUCTO	WENKE						
8600		5600						
	108°	117°						
GP 3.00° TCH 45	6500	5600						
					RW12 			
					6.8 NM	3.2 NM	7.3 NM	
CATEGORY	A	B	C	D				
RNP 0.12 DA#	3518/40 318 (400-¾)							
RNP 0.30 DA*	3880-2 680 (700-2)							
AUTHORIZATION REQUIRED								

ELEV 3206 D TDZE 3200

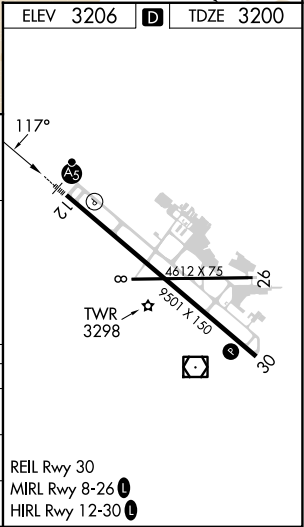

REIL Rwy 30
MIRL Rwy 8-26
HIRL Rwy 12-30

NW-1, 17 APR 2025 to 15 MAY 2025

NW-1, 17 APR 2025 to 15 MAY 2025