


WAAS CH 56410 W04A	APP CRS 042°	Rwy Idg 7504 TDZE 78 Apt Elev 79
----------------------------------------	------------------------	-------------------------------------------------------------

RNAV (GPS) RWY 4


MONROE RGNL (MLU)

RNP APCH.		MALSR 		MISSED APPROACH: Climb to 3000 direct LURBY and hold.	
<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. Circling ASR Rwy 14 NA at night. ** RVR 1800 authorized with use of FD or AP or HUD to DA.</p>					
ATIS 125.05	MONROE APP CON * 118.15 290.475	MONROE TOWER * 118.9 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.65	UNICOM 122.95

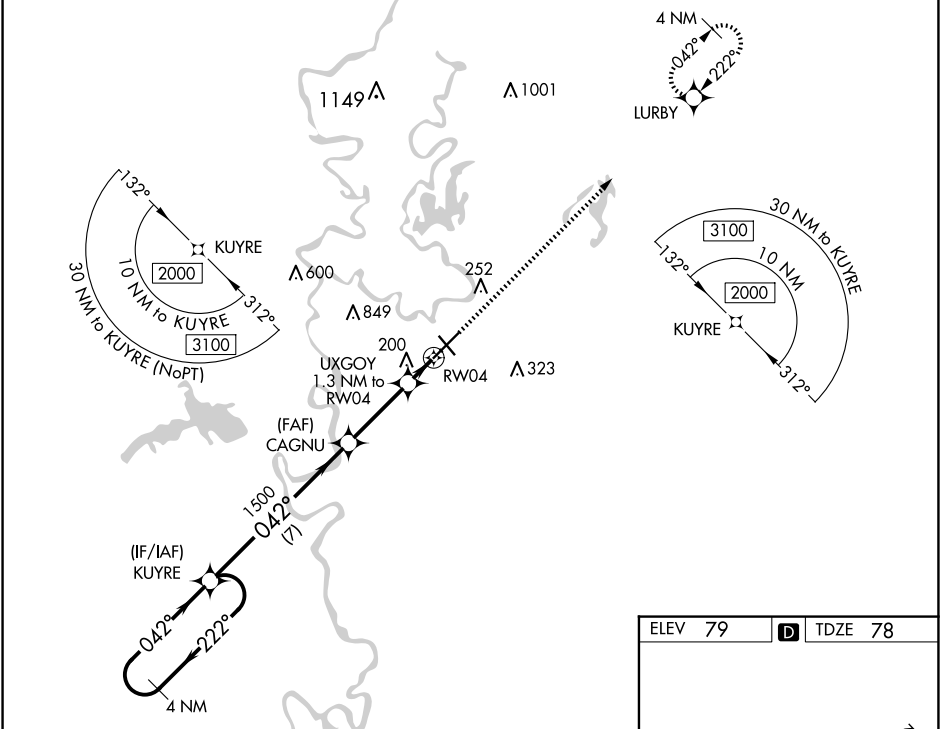

SC-4, 17 APR 2025 to 15 MAY 2025

SC-4, 17 APR 2025 to 15 MAY 2025

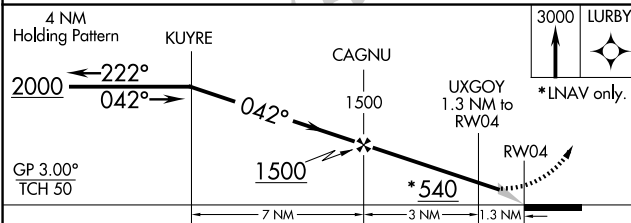

ELEV 79	D TDZE 78
---------	------------------

REIL Rws 14 and 32
MIRL Rwy 14-32 **1**
HIRL Rwy 4-22 **1**

CATEGORY	A	B	C	D
LPV DA **		278/24	200 (200-½)	
LNAV/VNAV DA		383/24	305 (400-½)	
LNAV MDA	460/24	382 (400-½)	460/35	382 (400-¾)
C CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)