# RNAV (GPS) RWY 36

## NORTHWEST ALABAMA RGNL (MSL)

| WAAS | APP CRS | Rwy Idg | 4000 |
|---|---|---|---|
| CH 61135 | 004° | TDZE | 547 |
| W36A | | Apt Elev | 551 |

RNP APCH-GPS.

Circling to Rwy 18 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Baro-VNAV and VDP NA when using Decatur altimeter setting. When local altimeter setting not received, use Decatur altimeter setting and increase LPV DA to 874, LNAV/VNAV DA to 1012 and all MDA 100 feet, increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase LNAV Cats C/D visibility ¼ mile, and Circling Cats C/D visibility ½ mile.

MISSED APPROACH: Climb to 3000 direct TUBYO and hold.

| ASOS | MEMPHIS CENTER | GCO | UNICOM |
|---|---|---|---|
| 119.425 | 120.8 307.0 | 121.725 | 123.05 (CTAF) L |

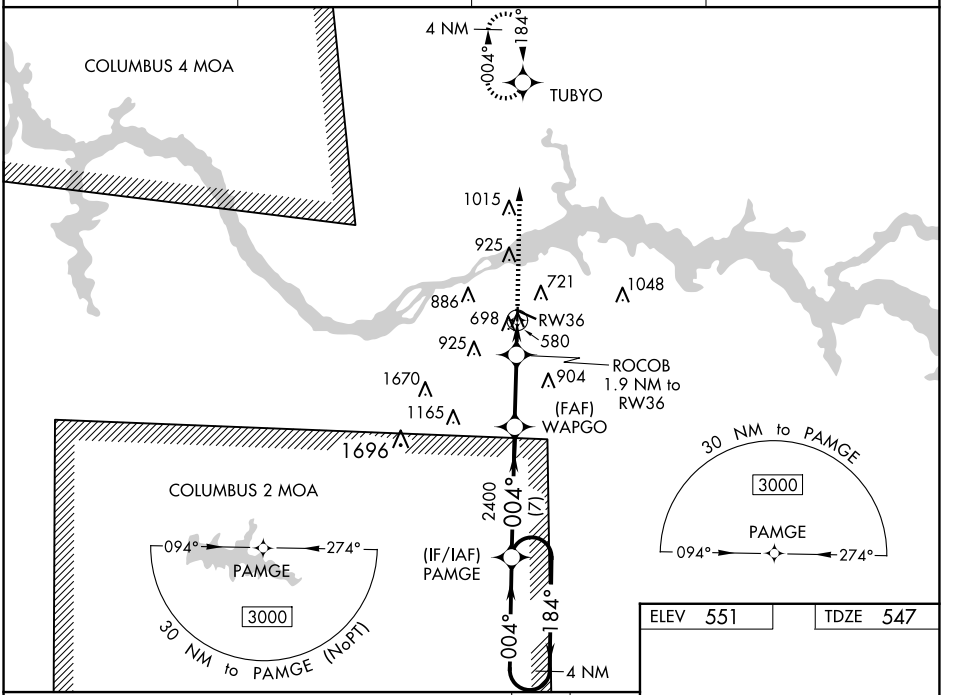


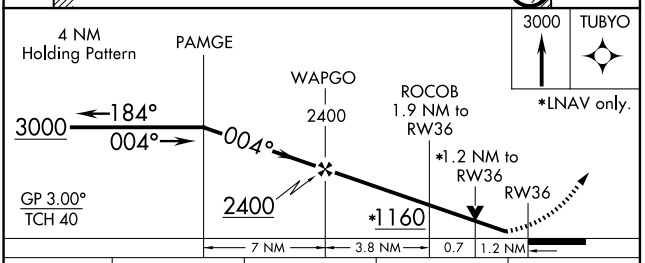


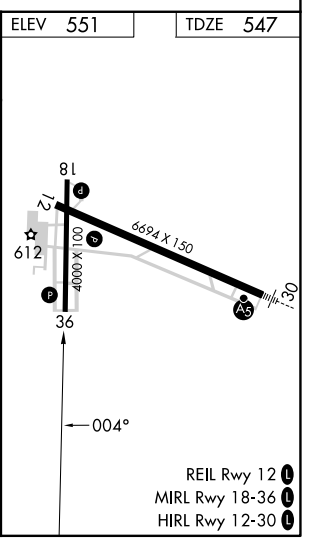


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 797-1 250 (300-1) | | | |
| LNAV/VNAV DA | 935-1⅜ 388 (400-1⅜) | | | |
| LNAV MDA | 960-1 413 (500-1) | | 960-1⅛ 413 (500-1⅛) | |
| C CIRCLING | 1040-1 489 (500-1) | | 1280-2 729 (800-2) | 1280-2¼ 729 (800-2¼) |

REIL Rwy 12 L
MIRL Rwy 18-36 L
HIRL Rwy 12-30 L




SE-4, 17 APR 2025 to 15 MAY 2025