

LOC I-PNO	APP CRS	Rwy Idg	9487
111.95	316°	TDZE	578
		Apt Elev	599

ILS or LOC RWY 31

NASHVILLE INTL (BNA)

▼

DME or radar required.

⚠



DME from BNA VORTAC.

⚠

Simultaneous reception of I-PNO and BNA DME required.

MISSED APPROACH: Climb to 1400 then climbing left turn to 4000 on BNA VORTAC R-270 to BEVEE/BNA 22.4 DME and hold.

D-ATIS	NASHVILLE APP CON	NASHVILLE TOWER	GND CON	CLNC DEL	CPDLC
135.1	118.4 360.7	118.6 257.8	121.9 348.6	126.05	

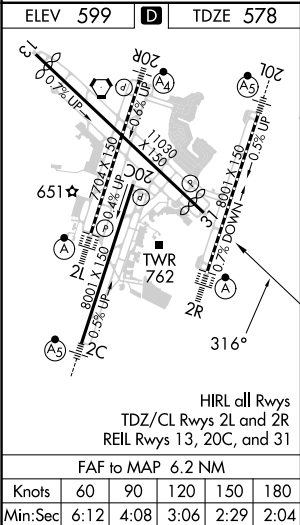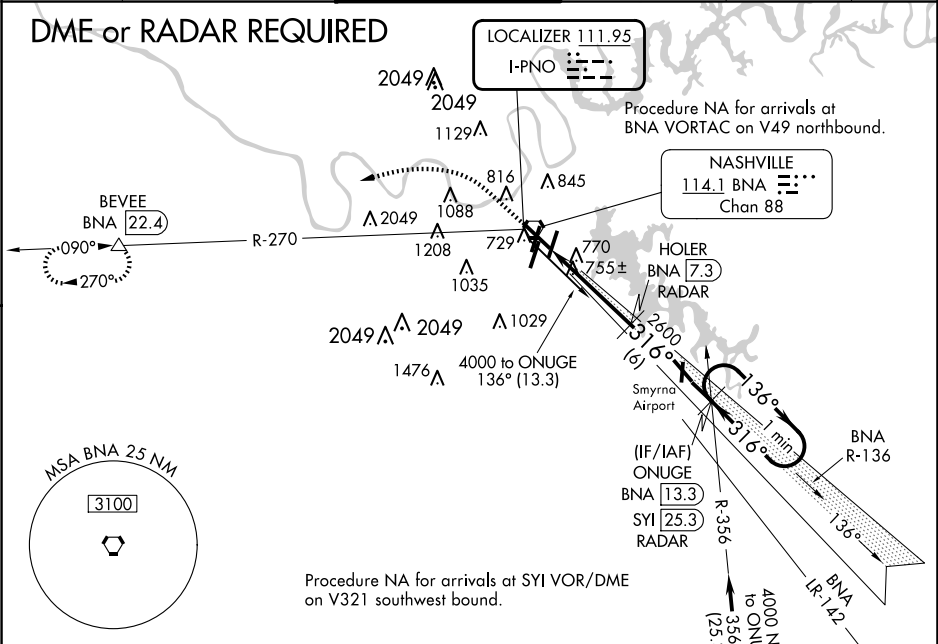

	1400	4000	BEVEE	HOLER BNA 7.3 RADAR	ONUGE BNA 13.3 RADAR	One Minute Holding Pattern
	BNA R-270		△			
* LOC only	* BNA 2.4			2600	136°	4000
	BNA 1.2			2600	← 316°	
					GS 3.00° TCH 52	
	1.2 NM	5 NM	6 NM			
CATEGORY	A	B	C	D		
S-ILS 31	778- ³ / ₄ 200 (200- ³ / ₄)					
S-LOC 31	1020-1	442 (500-1)	1020-1 ³ / ₈	442 (500-1 ³ / ₈)		
Ⓢ CIRCLING	1100-1 501 (600-1)	1120-1 521 (600-1)	1200-1 ³ / ₄ 601 (700-1 ³ / ₄)	1380-2 ¹ / ₂ 781 (800-2 ¹ / ₂)		