


|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Idg  | 9487 |
| 136°    | TDZE     | 567  |
|         | Apt Elev | 599  |

RNAV (GPS) RWY 13

NASHVILLE INTL (BNA)

|                                   |  |                                                                              |  |  |  |
|-----------------------------------|--|------------------------------------------------------------------------------|--|--|--|
| RNP APCH.                         |  | MISSED APPROACH: Climb to 3000 direct ONUGE and hold.                        |  |  |  |
| <div><div></div><div></div></div> |  | For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. |  |  |  |

|        |                   |                 |             |          |       |
|--------|-------------------|-----------------|-------------|----------|-------|
| D-ATIS | NASHVILLE APP CON | NASHVILLE TOWER | GND CON     | CLNC DEL | CPDLC |
| 135.1  | 118.4 360.7       | 118.6 257.8     | 121.9 348.6 | 126.05   |       |

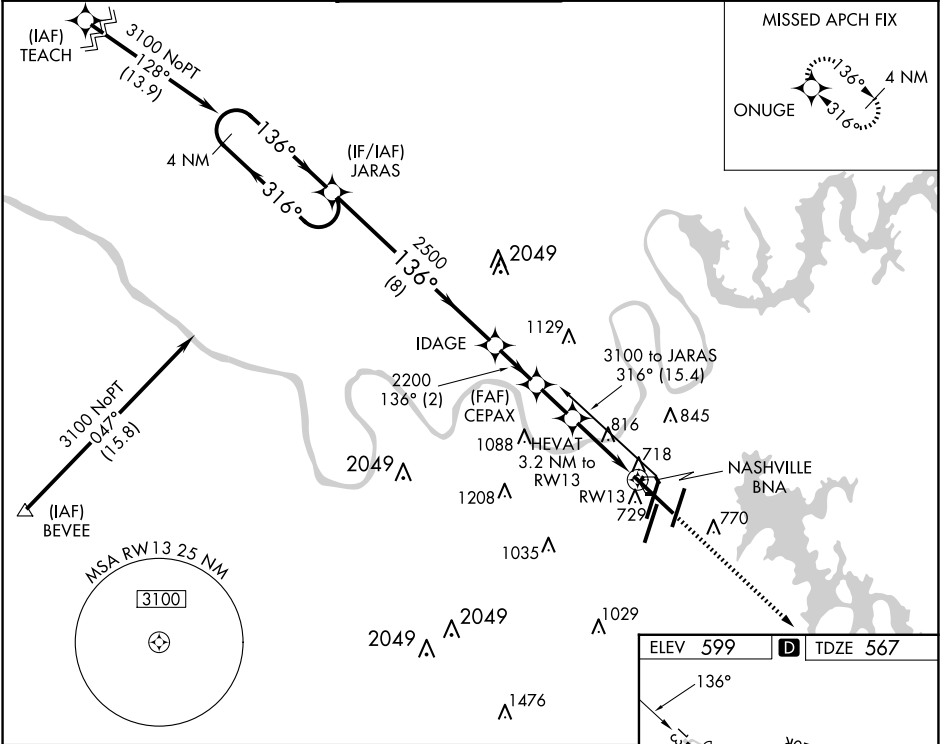

|                      |             |             |              |              |        |      |
|----------------------|-------------|-------------|--------------|--------------|--------|------|
| 4 NM Holding Pattern |             | JARAS       | IDAGE        | CEPAX        | HEVAT  | RW13 |
| 3100                 |             | 316°        | 136°         | 2500         | 2200   | 1600 |
| GP 3.00° TCH 55      |             |             |              |              |        |      |
|                      |             | 8 NM        | 2 NM         | 1.8 NM       | 1.9 NM | 1.3  |
| CATEGORY             | A           | B           | C            | D            |        |      |
| LNAV/VNAV DA         | 968-1½      |             | 401 (400-1½) |              |        |      |
| LNAV MDA             | 1080-1      | 513 (500-1) | 1080-1½      | 1080-1¾      |        |      |
|                      |             |             | 513 (500-1½) | 513 (500-1¾) |        |      |
| CIRCLING             | 1100-1      | 1120-1      | 1200-1¾      | 1380-2½      |        |      |
|                      | 501 (600-1) | 521 (600-1) | 601 (700-1¾) | 781 (800-2½) |        |      |

