

APP CRS	Rwy Idg	6501
288°	TDZE	10
	Apt Elev	18

RNAV (RNP) Y RWY 29

NEWARK LIBERTY INTL (EWR)


RNP AR APCH. RF required.

T Straight-in Rwy 29 at night, operational VGSi required, remain on or above VGSi glidepath until threshold. For uncompensated Baro-VNAV systems, **NA** procedure NA below -12°C or above 54°C.



MISSED APPROACH: Climb to 2000 on track 288° to MUFIE and hold.

** Missed approach requires a minimum climb of 417 feet per NM to 800.

D-ATIS	NEWARK APP CON	NEWARK TOWER	GND CON	CLNC DEL	CPDLC
115.7 134.825	128.55 379.9	118.3 257.6	121.8	118.85	

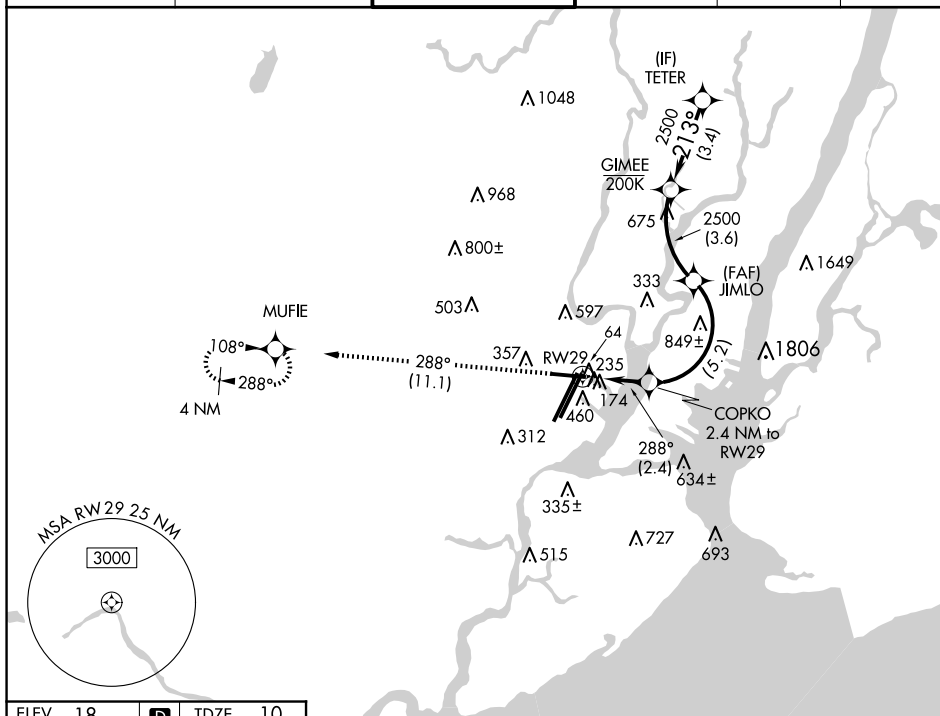

ELEV	18	D	TDZE	10
------	----	----------	------	----

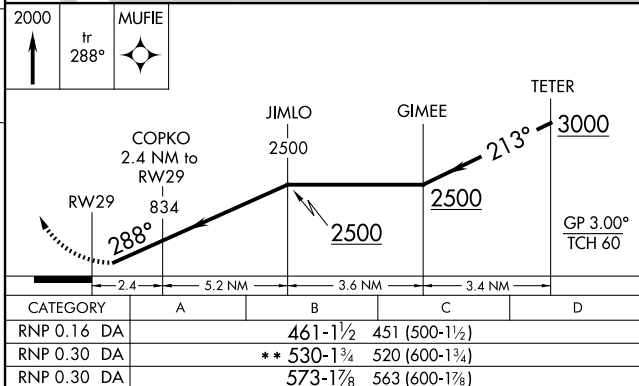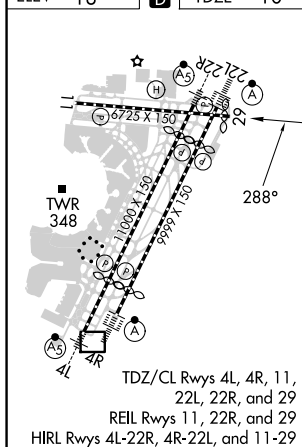

AUTHORIZATION REQUIRED