


APP CRS	Rwy Idg	7002
224°	TDZE	12
	Apt Elev	21

RNAV (RNP) Z RWY 22

LAGUARDIA (LGA)

RNP AR APCH - GPS. RF required.		ALSIF-1 	MISSED APPROACH: Climb to 3000 direct PROUD and hold, continue climb-in-hold to 3000. *Missed approach requires minimum climb of 397 feet per NM to 560.
	For uncompensated Baro-VNAV systems, procedure NA below -11°C or above 54°C. For inop ALS, increase RNP 0.30 DA* visibility to RVR 5500.		

D-ATIS ARR	125.95	NEW YORK APP CON	120.8 263.0	LAGUARDIA TOWER	118.7 263.0	GND CON	121.7 263.0	CLNC DEL	135.2	CPDLC	
D-ATIS DEP	127.05										

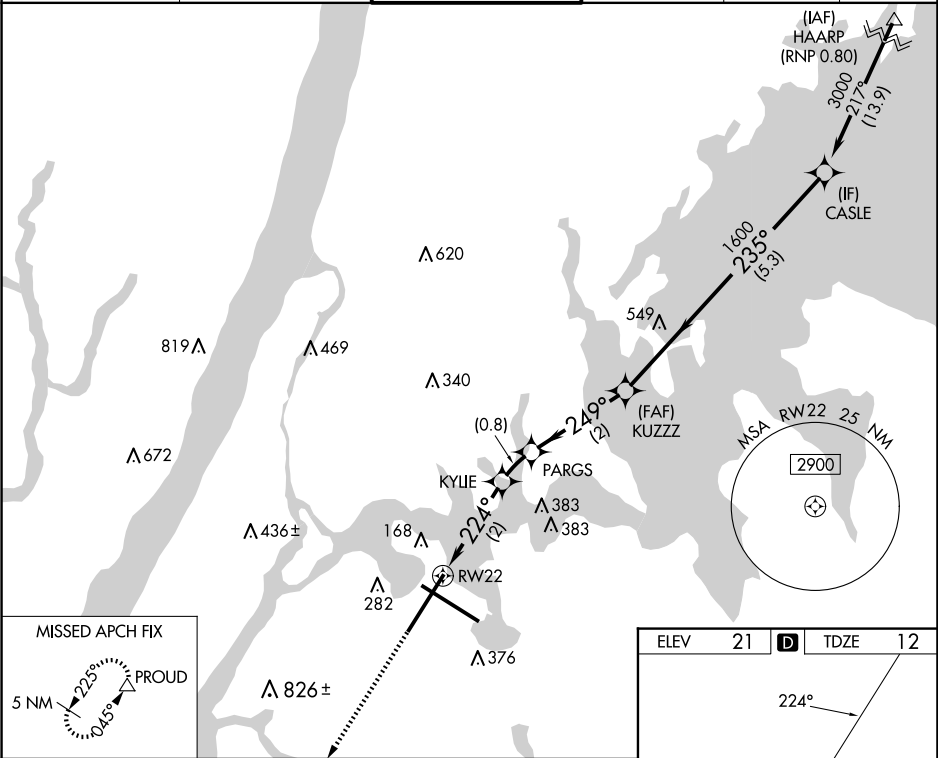

3000 ↑ PROUD △		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 67).			
		KYLIE 704	PARGS 947	KUZZZ 1600	CASLE 3000
CATEGORY	A	B	C	D	
RNP 0.30 DA*	384/35		372 (400-¾)		
RNP 0.30 DA	445/40		433 (500-¾)		
AUTHORIZATION REQUIRED					

