

LOC/DME I-PNS	APP CRS	Rwy Idg
111.1	169°	7004
Chan 48		TDZE 121
		Apt Elev 121

ILS or LOC RWY 17

PENSACOLA INTL (PNS)

▼



▲

For inop ALS, increase S-LOC 17 Cats A/B to RVR 5500 and Cats C/D to 1 ¼ SM. ALICO FIX MINIMUMS: For inop ALS increase S-LOC 17 all Cats visibility to RVR 5500.
CAUTION: Intensive VFR student training in vicinity of airport.

MALSR

MISSED APPROACH: Climb to 600 then climbing right turn to 3000 direct NUN VOR and hold, continue climb-in-hold to 3000.

ATIS	PENSACOLA APP CON	PENSACOLA TOWER ★	GND CON	CLNC DEL	UNICOM
121.25	119.0 269.375	119.9 (CTAF) 0 257.8	121.9 348.6	123.725 256.875	122.95

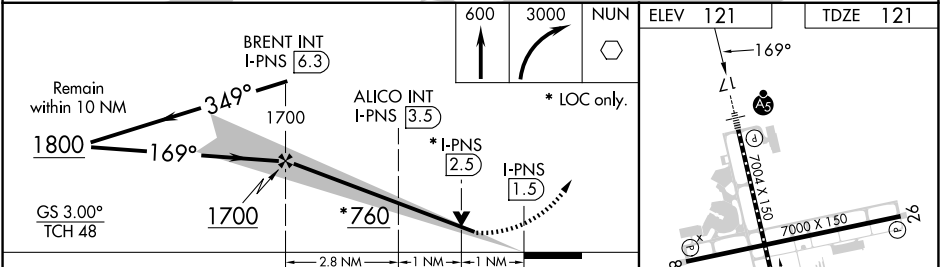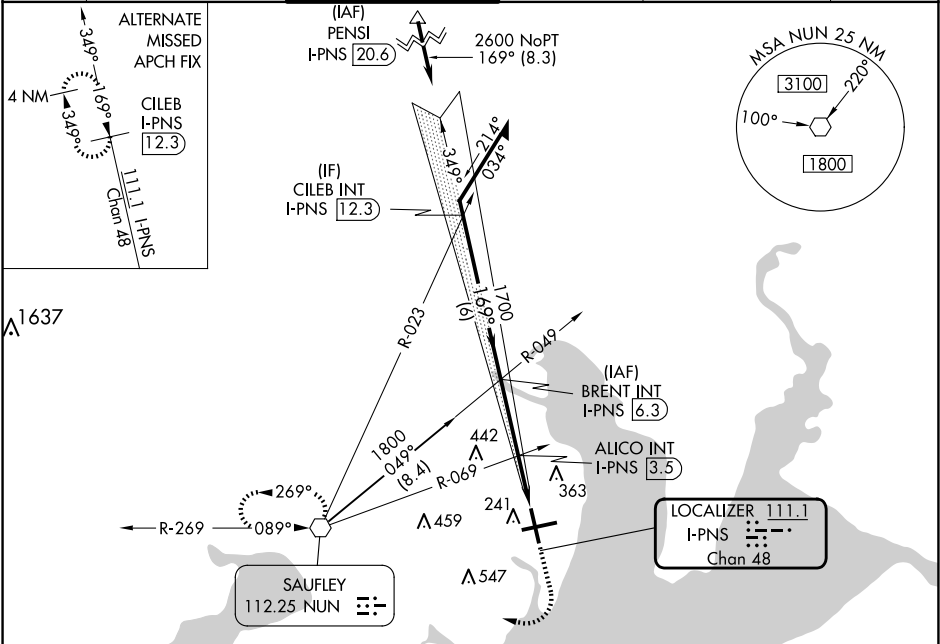

CATEGORY	A	B	C	D
S-ILS 17		321/18	200 (200-½)	
S-LOC 17	760/24	639 (700-½)	760-1¾	639 (700-1¾)
CIRCLING	760-1	639 (700-1)	860-2 739 (800-2)	860-2¼ 739 (800-2¼)
ALICO FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 17	480/24	359 (400-½)	480/30	359 (400-¾)
CIRCLING	580-1 459 (500-1)	680-1 559 (600-1)	860-2 739 (800-2)	860-2¼ 739 (800-2¼)
REIL Rwy 8, 26 and 35 TDZ/CL Rwy 17 HIRL Rwy 8-26 and 17-35 FAF to MAP 4.8 NM				
Knots				
Min:Sec				
60 90 120 150 180				
4:48 3:12 2:24 1:55 1:36				