


WAAS CH 40023 W09A	APP CRS 087°	Rwy Idg TDZE 21 Apt Elev 36	12000
--	------------------------	---	--------------

RNAV (GPS) Y RWY 9R

PHILADELPHIA INTL (PHL)

<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. ▲ For inop ALS, increase LNAV/VNAV visibility all Cats to RVR 5000 and LNAV Cats C/D visibility to RVR 6000.</p>	<p>ALSF-2</p>	<p>MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct OOD VORTAC and hold.</p>		
			<p>D-ATIS ARR 133.4 DEP 135.925</p>	<p>PHILADELPHIA APP CON 124.35 319.15</p>

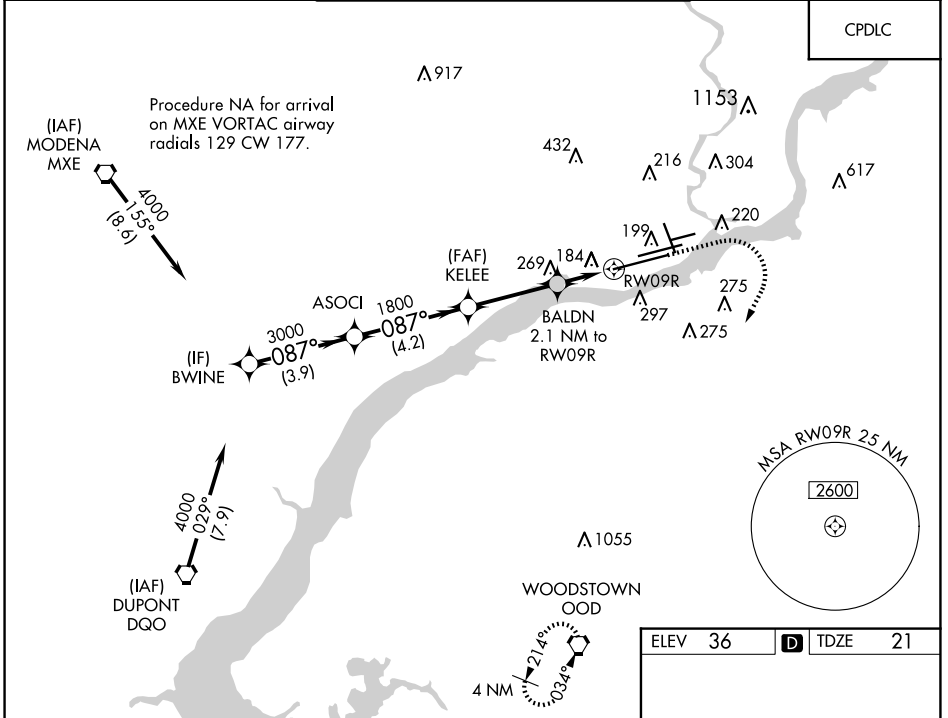

<p>BWINE VGSi and RNAV glidepath not coincident ASOCI (VGSi Angle 3.00/TCH 72).</p>		<p>1500</p>	<p>3000</p>	<p>OOD</p>
<p>4000 087°</p> <p>3000</p> <p>1800</p> <p>*740</p> <p>GP 3.00° TCH 58</p>		<p>KELEE</p>	<p>BALDN 2.1 NM to RWY09R</p>	<p>*LNAV only.</p>
<p>3.9 NM</p> <p>4.2 NM</p> <p>3.3 NM</p> <p>1 NM</p> <p>1.1 NM</p>		<p>1.1 NM to RWY09R</p>	<p>RWY09R</p>	<p>0.5% UP</p> <p>5001 X 150</p> <p>27R</p> <p>TWR 147</p>
CATEGORY	A	B	C	D
LPV DA		221/18	200 (200-½)	
LNAV/VNAV DA		346/30	325 (400-¾)	
LNAV MDA	440/24	419 (500-½)	440/40	419 (500-¾)
CIRCLING	540-1 504 (600-1)	640-1 604 (700-1)	640-1¾ 604 (700-1¾)	720-2¼ 684 (700-2¼)
<p>TDZ/CL Rwy 9R HIRL all Rwys REIL Rwys 9L and 35</p>				

NE-4, 17 APR 2025 to 15 MAY 2025

NE-4, 17 APR 2025 to 15 MAY 2025