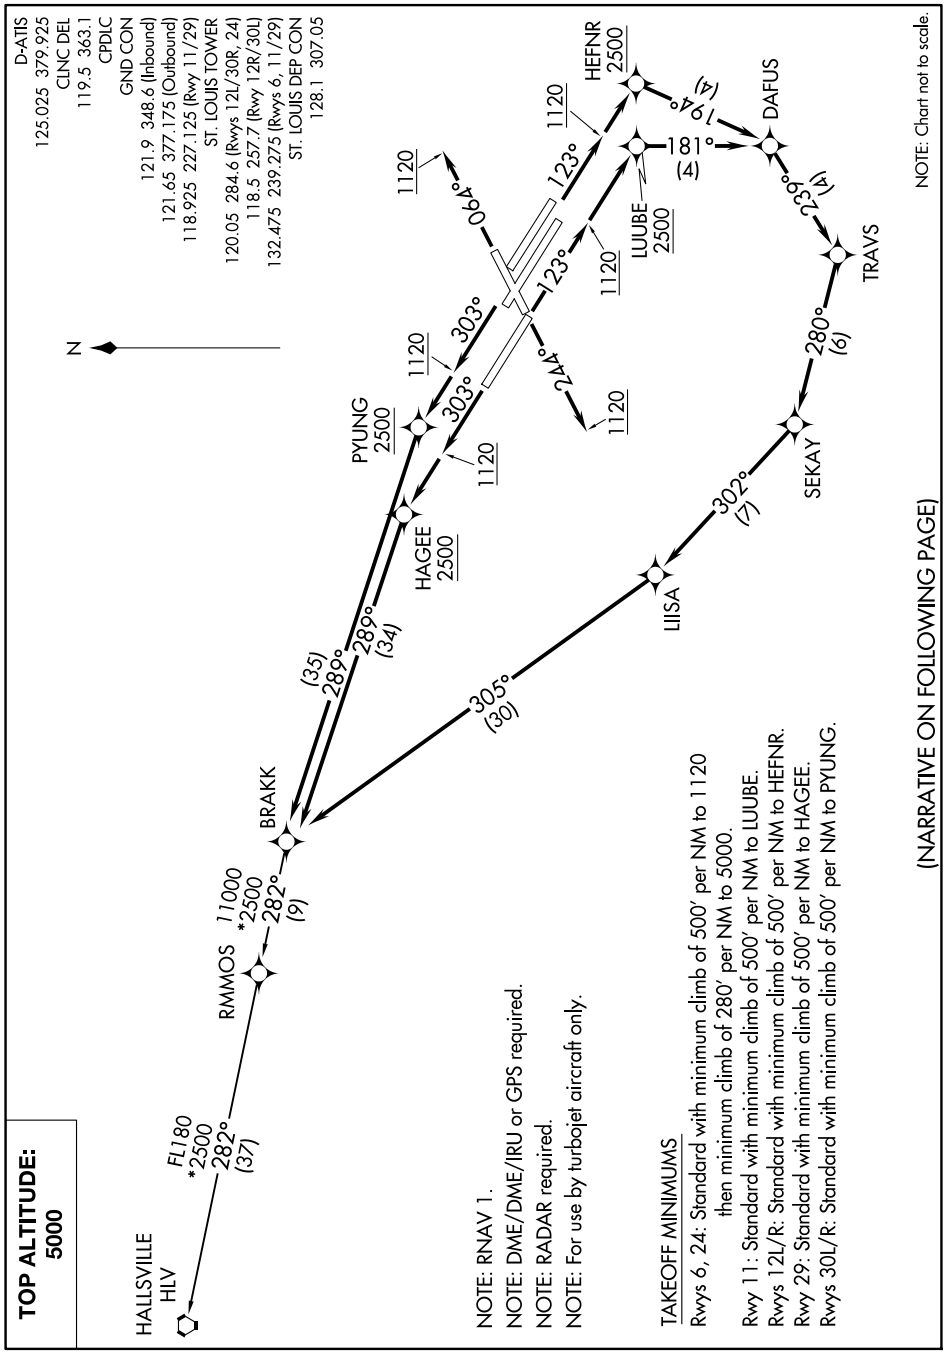

TOP ALTITUDE: 5000

NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: RADAR required.
NOTE: For use by turbojet aircraft only.

TAKEOFF MINIMUMS
Rwys 6, 24: Standard with minimum climb of 500′ per NM to 1120 then minimum climb of 280′ per NM to 5000.
Rwy 11: Standard with minimum climb of 500′ per NM to LUUBE.
Rwys 12L/R: Standard with minimum climb of 500′ per NM to HEFNR.
Rwy 29: Standard with minimum climb of 500′ per NM to HAGEE.
Rwys 30L/R: Standard with minimum climb of 500′ per NM to PYUNG.

(NARRATIVE ON FOLLOWING PAGE)