


APP CRS	Rwy Idg	8956
123°	TDZE	541
	Apt Elev	617

RNAV (RNP) Z RWY 12L
ST LOUIS LAMBERT INTL (STL)

RNP AR APCH - GPS. Authorization required from HRBEE or RRIPP: RF.			ALSF-2	MISSED APPROACH: Climb to 3000 direct ODITY and track 071° to TOY VORTAC and hold.	
RADAR required for procedure entry					
▼ Use of FD or AP required during simultaneous operations. Simultaneous approach authorized with Rwy 11, except for arrivals at RRIPP and HRBEE. For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ SM.					
D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)		CLNC DEL 119.5 363.1 CPDLC

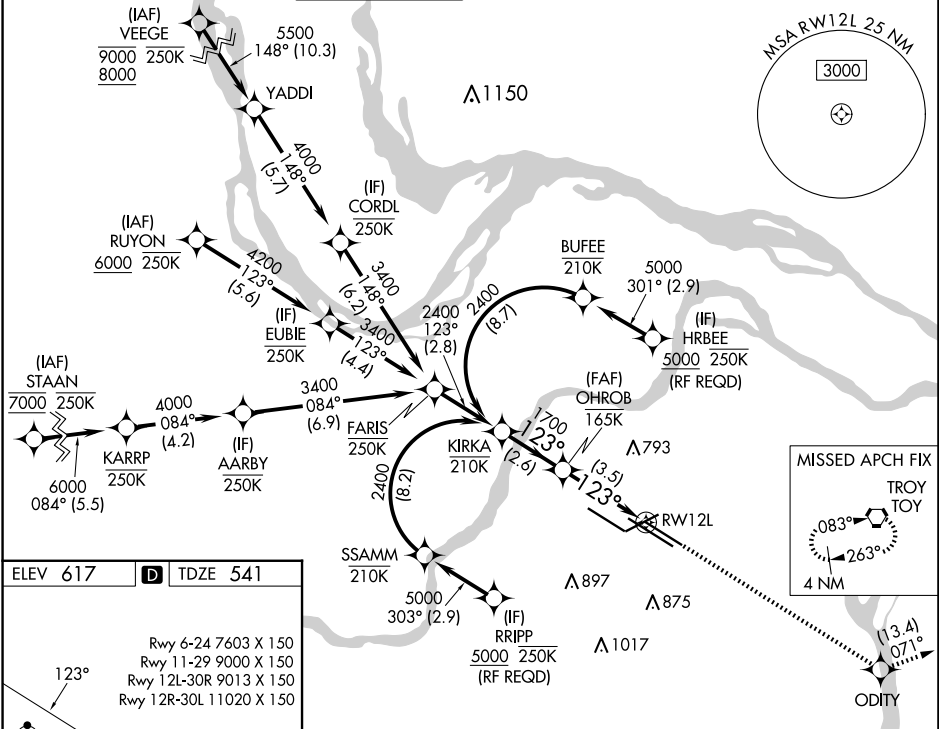

ELEV 617 TDZE 541

Rwy 6-24 7603 X 150
Rwy 11-29 9000 X 150
Rwy 12L-30R 9013 X 150
Rwy 12R-30L 11020 X 150

HIRL all Rwys
TDZ/CL Rwys 11, 12L, 12R, 29, and 30R

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 56).

3000 ODITY tr 071° TOY

See planview for multiple IF locations.

GP 3.00° TCH 54

2.6 NM 3.5 NM

RNP 0.30 DA 1055/55 514 (500-1)

AUTHORIZATION REQUIRED

NC-3, 17 APR 2025 to 15 MAY 2025

NC-3, 17 APR 2025 to 15 MAY 2025