
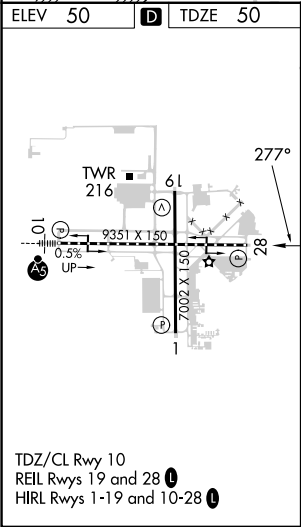


WAAS CH 40015 W28A	APP CRS 277°	Rwy Idg 9351 TDZE 50 Apt Elev 50
--	------------------------	---

RNAV (GPS) Z RWY 28
SAVANNAH/HILTON HEAD INTL (SAV)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).		MISSED APPROACH: Climb to 2600 direct TILEE and hold.			
ATIS 123.75	SAVANNAH APP CON★ 125.3 371.875	SAVANNAH TOWER★ 125.975 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 119.55 291.775	UNICOM 122.95

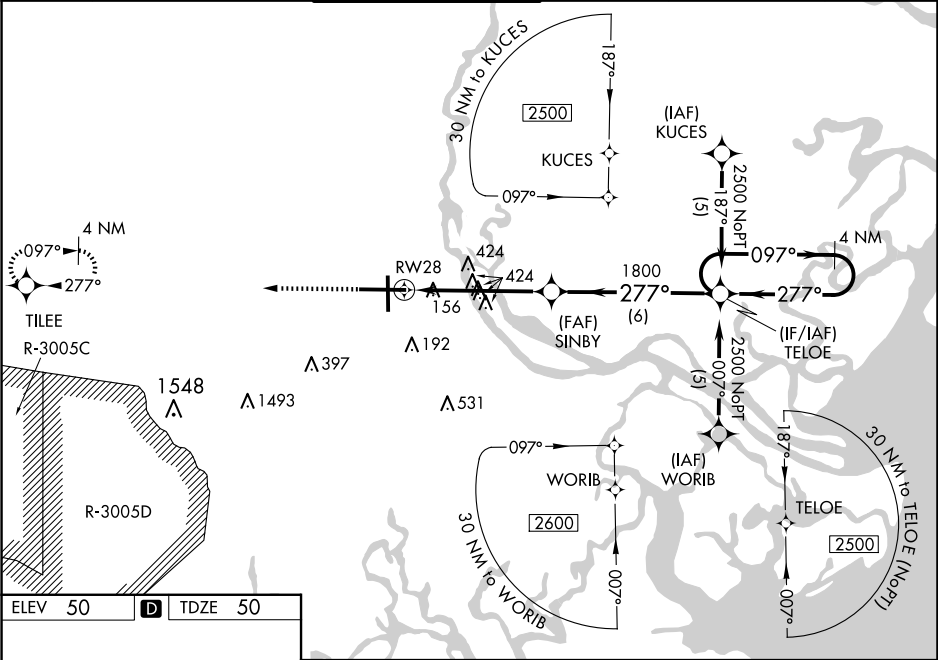

2600 TILEE VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).		TELOE 4 NM Holding Pattern GP 3.00° TCH 52			
*LNAV only.		SINBY 1800 RW28 1.8 NM to RW28 1.8 NM 3.5 NM 6 NM			
CATEGORY	A	B	C	D	
LPV DA	307-1 257 (300-1)				
LNAV/VNAV DA	431-1¼ 381 (400-1¼)				
LNAV MDA	680-1	630 (700-1)	680-1¾	630 (700-1¾)	
CIRCLING	680-1	630 (700-1)	740-2 690 (700-2)	740-2¼ 690 (700-2¼)	

SE-4, 17 APR 2025 to 15 MAY 2025

SE-4, 17 APR 2025 to 15 MAY 2025