

WAAS CH 90205 W33A	APP CRS 329°	Rwy Idg 8014 TDZE 165 Apt Elev 166
--	------------------------	---

RNAV (GPS) RWY 33


CRAIG FLD (SEM)

⚠ Baro-VNAV NA when using Montgomery altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). For inoperative MALS, increase LNAV/VNAV all Cats visibility to ¾ mile and LNAV Cats C and D visibility to 1 ½ mile. DME/DME RNP-0.3 NA. VDP NA with Montgomery altimeter setting. When local altimeter setting not received, use Montgomery altimeter setting and increase all DA 78 feet, all MDA 80 feet, LNAV Cats C and D visibility ½ mile and increase Circling Cat C visibility ½ mile and Cat D visibility ¼ mile. For inoperative MALS, when using Montgomery altimeter setting, increase LPV all Cats visibility to ¾ mile, LNAV/VNAV all Cats visibility to 1 mile, LNAV Cat C and D visibility to 1 ½ mile.

MALS

MISSED APPROACH:
Climb to 2800 direct
BOTAY and hold.

AWOS-3PT 119.15	MONTGOMERY APP CON ★ 124.0 363.025	CRAIG TOWER★ 120.85	GND CON 121.675	UNICOM 122.7 (CTAF) ①
---------------------------	--	-------------------------------	---------------------------	---------------------------------

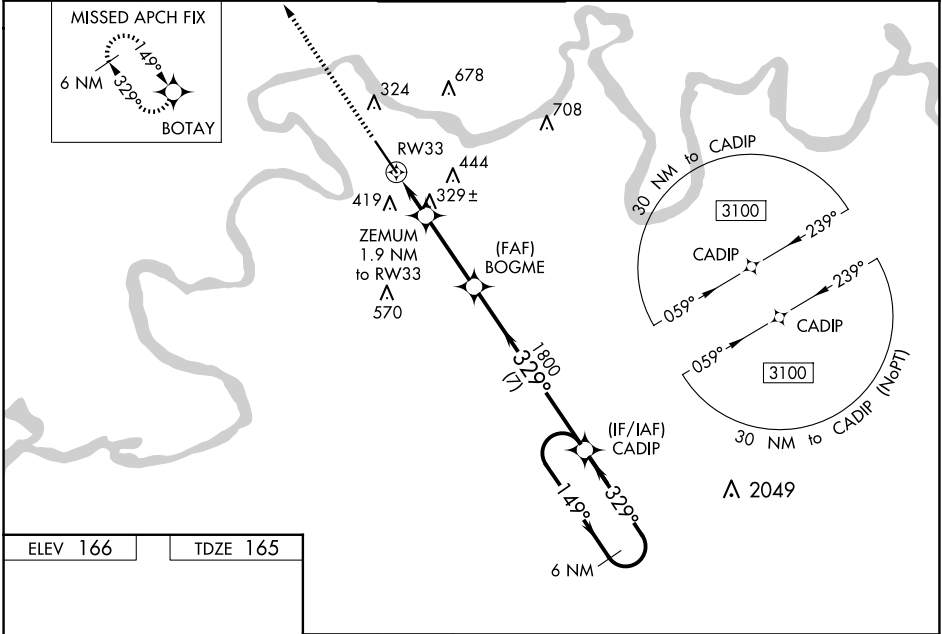

2800	BOTAY	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 56).		6 NM Holding Pattern
*LNAV only.		ZEMUM 1.9 NM to RW33	BOGME	CADIP
		*1.3 NM to RW22	1800	149°→ ←329° 3100
		<u>820*</u>	<u>1800</u>	GP 3.00° TCH 55°
		1.3 NM	0.6 NM	3.1 NM
				7 NM
CATEGORY	A	B	C	D
LPV DA		365-¾	200 (200-¾)	
LNAV/ DA VNAV		462-¾	297 (300-¾)	
LNAV MDA	580-¾	415 (500-¾)	580-1	415 (500-1)
CIRCLING	660-1 494 (500-1)	760-1 594 (600-1)	760-1½ 594 (600-1½)	1040-2¾ 874 (900-2¾)