



|                                                                                                                |                  |                                                      |               |                                                                                                                         |
|----------------------------------------------------------------------------------------------------------------|------------------|------------------------------------------------------|---------------|-------------------------------------------------------------------------------------------------------------------------|
| LOC I-JOU<br>111.1                                                                                             | APCH CRS<br>210° | Rwy ldg<br>8999<br>TDZE<br>1430<br>Arpt Elev<br>1430 | AL-396 [USAF] | JOE FOSS FLD (KFSD)                                                                                                     |
| DME required. RADAR required for procedure entry.                                                              |                  |                                                      | MALS R        | MISSED APPROACH: Climb to 3400 then climbing right turn to 5000 on heading 300° and FSD R-269 to FRYRE 15 DME and hold. |
| * When ALS inop, increase RVR to 40 and vis to ¾ miles.<br>** When ALS inop, increase CAT CDE vis to 1½ miles. |                  |                                                      |               |                                                                                                                         |

|               |                                    |                                          |                        |     |
|---------------|------------------------------------|------------------------------------------|------------------------|-----|
| ATIS<br>126.6 | SIoux FALLS APP CON<br>125.8 306.2 | SIoux FALLS TOWER ★<br>118.3(CTAF) 257.8 | GND CON<br>121.9 348.6 | ASR |
|---------------|------------------------------------|------------------------------------------|------------------------|-----|

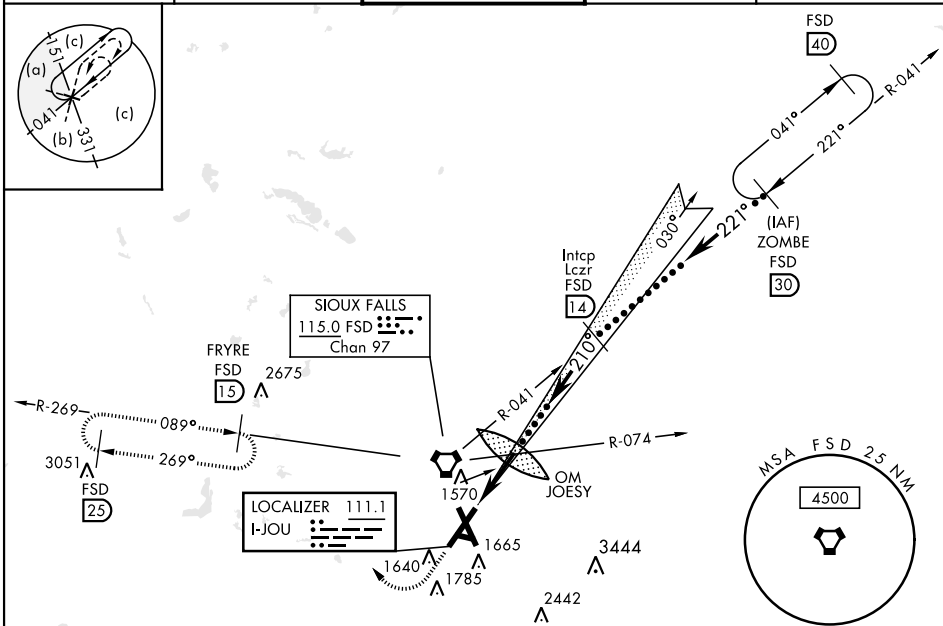

EMERG SAFE ALT 100 NM 4600

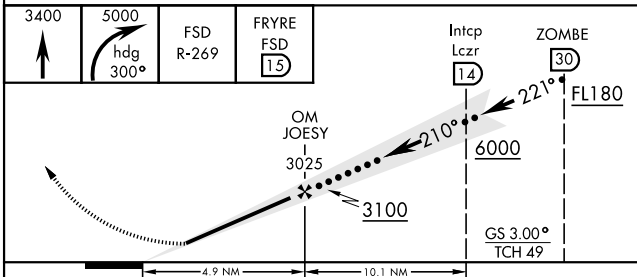

| CATEGORY   | C                       | D                       | E                       |
|------------|-------------------------|-------------------------|-------------------------|
| S-ILS 21*  | 1630/18                 | 200                     | (200-½)                 |
| S-LOC 21** | 1920/50                 | 490 (500-1)             | 1920/60<br>490 (500-1½) |
| CIRCLING   | 2060-1¾<br>630 (700-1¾) | 2200-2½<br>770 (800-2½) | 2300-3<br>870 (900-3)   |