

SIoux FALLS, SOUTH DAKOTA

AL-396 (FAA)

25051

WAAS CH 99323 W21A	APP CRS 210°	Rwy Idg 8999 TDZE 1430 Apt Elev 1430
--	------------------------	---

RNAV (GPS) RWY 21
JOE FOSS FLD (FSD)


JOE FOSS FLD (FSD)

▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LPV all Cats visibility to RVR 4000 and LNAV/VNAV all Cats visibility to RVR 4500.


MALSR

MISSED APPROACH:
Climb to 4000 direct
KASME and hold.

ATIS 126.6	SIoux FALLS APP CON★ 125.8 284.725	SIoux FALLS TOWER★ 118.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
---------------	---------------------------------------	--	------------------------	------------------

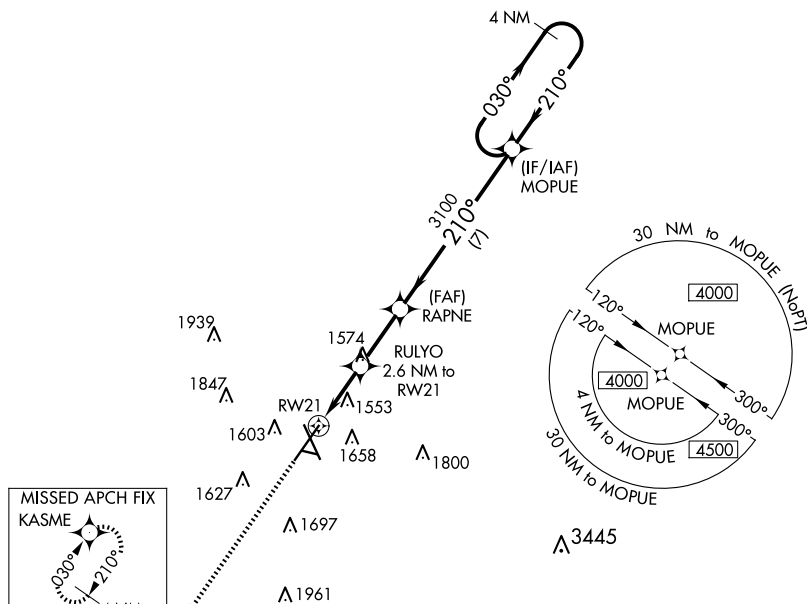

ELEV 1430	D	TDZE 1430
-----------	----------	-----------

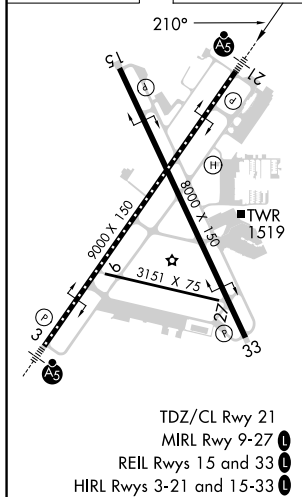

4000' KASME

*LNAV only.

RW21

*1.1 NM to RW21

RULYO 2.6 NM to RW21

RAPNE 3100

MOPUE

4 NM Holding Pattern

030° → 4000

← 210°

*2300

3100

GP 3.00° TCH 49

1.1 NM 1.5 2.5 NM 7 NM

CATEGORY	A	B	C	D
LPV DA	1630/18		200 (300-½)	
LNAV/VNAV DA	1704/24		274 (300-½)	
LNAV MDA	1820/24 390 (400-½)		1820/35 390 (400-⅝)	
CIRCLING	1960-1 530 (600-1)	1980-1 550 (600-1)	2060-1¾ 630 (700-1¾)	2200-2 ½ 770 (800-2 ½)

SIoux FALLS, SOUTH DAKOTA

Amdt 2 07DEC17

43°35'N-96°45'W

JOE FOSS FLD (FSD)

RNAV (GPS) RWY 21

NC-1, 17 APR 2025 to 15 MAY 2025