
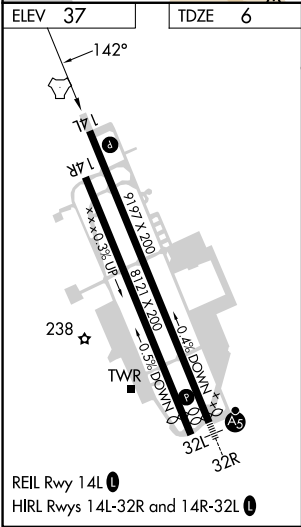


|                                        |                        |                             |                                      |
|----------------------------------------|------------------------|-----------------------------|--------------------------------------|
| WAAS<br>CH <b>70442</b><br><b>W14A</b> | APP CRS<br><b>142°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>9197</b><br><b>6</b><br><b>37</b> |
|----------------------------------------|------------------------|-----------------------------|--------------------------------------|

RNAV (GPS) RWY 14L  
MOFFETT FEDERAL AIRFIELD (NUQ)

|                                                                              |  |                                                                                      |  |
|------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------|--|
| RNP APCH.                                                                    |  | MISSED APPROACH: Climb to 500 then climbing left turn to 3200 direct PEYIC and hold. |  |
| ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C. |  |                                                                                      |  |

|                              |                                       |                                                  |                                 |                           |
|------------------------------|---------------------------------------|--------------------------------------------------|---------------------------------|---------------------------|
| ATIS<br><b>124.175 283.0</b> | NORCAL APP CON<br><b>120.1 290.25</b> | MOFFETT TOWER ★<br><b>119.55 0 (CTAF) 259.65</b> | GND CON<br><b>121.85 278.95</b> | CLNC DEL<br><b>296.75</b> |
|------------------------------|---------------------------------------|--------------------------------------------------|---------------------------------|---------------------------|

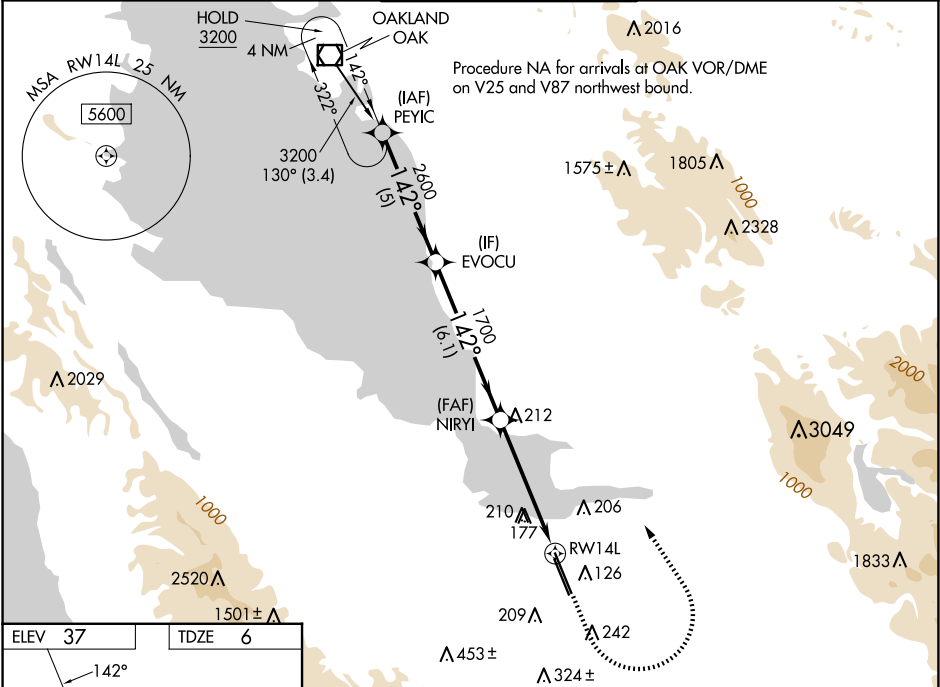

|              |                      |  |                      |   |                        |
|--------------|----------------------|--|----------------------|---|------------------------|
|              |                      |  |                      |   |                        |
| CATEGORY     | A                    |  | B                    | C | D                      |
| LPV DA       | 256-¾ 250 (300-¾)    |  |                      |   |                        |
| LNAV/VNAV DA | 326-⅞ 320 (300-⅞)    |  |                      |   |                        |
| LNAV MDA     | 440-1 434 (500-1)    |  | 440-1¼ 434 (500-1¼)  |   |                        |
| CIRCLING     | 540-1<br>503 (600-1) |  | 600-1<br>563 (600-1) |   | 620-1½<br>583 (600-1½) |
|              |                      |  |                      |   | 780-2¼<br>743 (800-2¼) |