
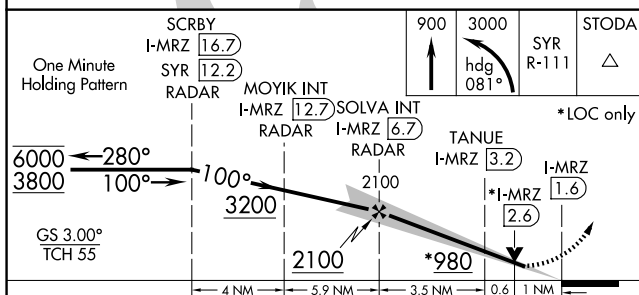


ILS or LOC RWY 10
SYRACUSE HANCOCK INTL (SYR)


MALSR

MISSED APPROACH: Climb to 900 then climbing left turn to 3000 on heading 081° and on SYR VORTAC R-111 to STODA INT/ SYR VORTAC 15.5 DME/RADAR and hold

ATIS 124.225	SYRACUSE APP CON 126.125 269.125	SYRACUSE TOWER 120.3 239.0	GND CON 121.7 348.6	CLNC DEL 125.05 257.775
-----------------	-------------------------------------	-------------------------------	------------------------	----------------------------

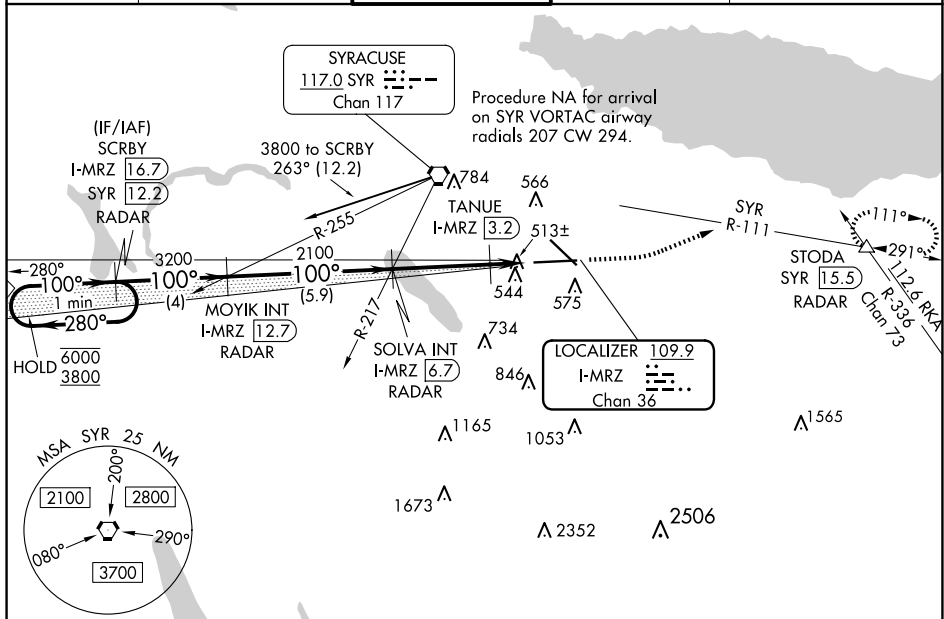

CATEGORY	A	B	C	D
S-ILS 10**	621/24		200 (200-½)	
S-LOC 10	980/24	559 (600-½)	980/60	559 (600-1¼)
 CIRCLING	980-1	559 (600-1)	1020-1 ⁵ / ₈ 599 (600-1 ⁵ / ₈)	1180-2 ¹ / ₂ 759 (800-2 ¹ / ₂)
TANUE FIX MINIMUMS (DME REQUIRED)				
S-LOC 10	780/24	359 (400-½)	780/30	359 (400-¾)
 CIRCLING	900-1 479 (500-1)	920-1 499 (500-1)	1020-1 ¹ / ₂ 599 (600-1 ¹ / ₂)	1180-2 ¹ / ₂ 759 (800-2 ¹ / ₂)

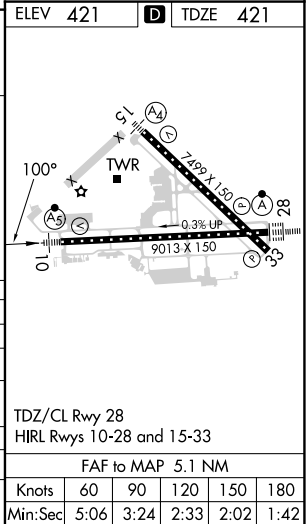

NE-2, 17 APR 2025 to 15 MAY 2025