


LOC/DME I-SYR 109.9 Chan 36	APP CRS 280°	Rwy Idg TDZE Apt Elev	9013 413 421
---	------------------------	-----------------------------	---


ILS or LOC RWY 28
SYRACUSE HANCOCK INTL (SYR)

DME or RADAR required.		ALSF-2	MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct SYR VORTAC and hold, continue climb-in-hold to 3000.
------------------------	--	--------	---

ATIS 124.225	SYRACUSE APP CON 126.125 269.125	SYRACUSE TOWER 120.3 239.0	GND CON 121.7 348.6	CLNC DEL 125.05 257.775
------------------------	--	--------------------------------------	-------------------------------	-----------------------------------

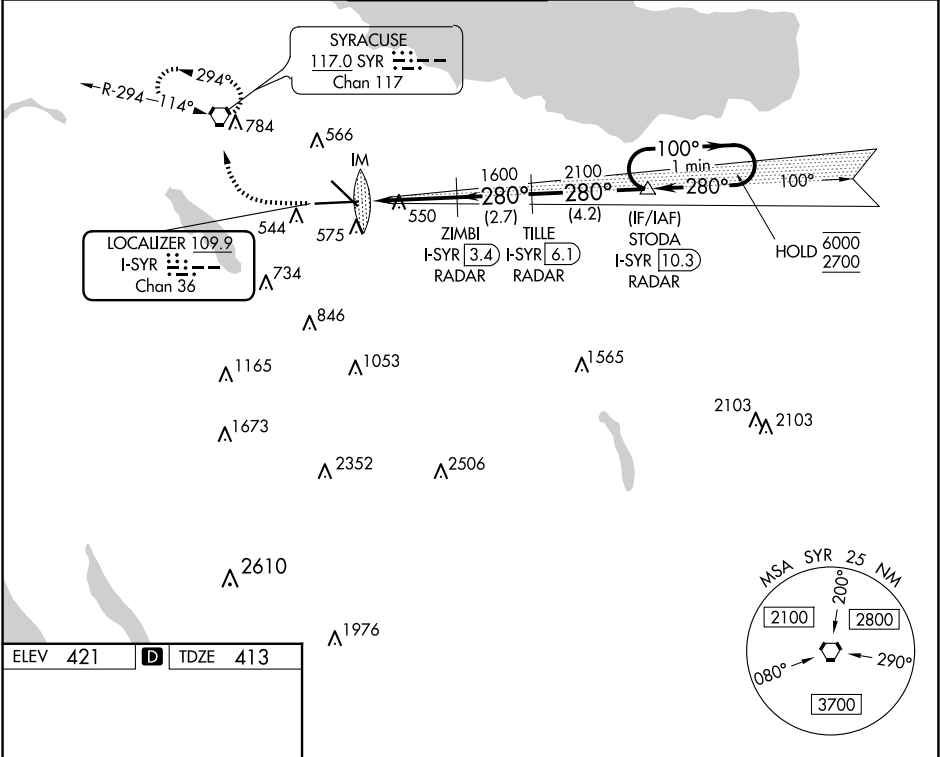

ELEV 421	D	TDZE 413
-----------------	----------	-----------------

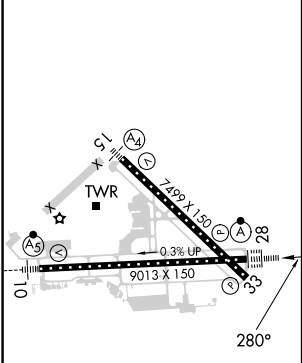

TDZ/CL Rwy 28					
HIRL Rlys 10-28 and 15-33					
FAF to MAP 3.6 NM					
Knots	60	90	120	150	180
Min:Sec	3:36	2:24	1:48	1:26	1:12

1100 ↑		3000 ↗		SYR 		*LOC only		STODA I-SYR 10.3 RADAR		One Minute Holding Pattern	
I-SYR 0.2 		I-SYR 0.9 IM ↓		ZIMBI I-SYR 3.4 RADAR		TILE I-SYR 6.1 RADAR		1600 ↗		100° → 6000 ← 280° 2700	
DME ANTENNA				1600		2100		1600 ↖		GS 3.00° TCH 78	
0.2		0.9		2.5 NM		2.7 NM		4.2 NM			
CATEGORY		A		B		C				D	
S-ILS 28				613/18		200 (200-½)					
S-LOC 28		800/24		387 (400-½)		800/35		387 (400-¾)			
 CIRCLING		900-1		920-1		1020-1½		1180-2½			
		479 (500-1)		499 (500-1)		599 (600-1½)		759 (800-2½)			