

WAAS CH 45517 W28A	APP CRS 281°	Rwy Idg 9013 TDZE 413 Apt Elev 421
--	------------------------	---

RNAV (GPS) Z RWY 28
SYRACUSE HANCOCK INTL (SYR)


▽
▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-6°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
For inop ALSF-2, increase LNAV Cats C/D visibility to 1½ mile.


ALSF-2

MISSED APPROACH: Climb to 3000 direct SOLVA and on track 295° to WIFFY and hold.

ATIS 124.225	SYRACUSE APP CON 126.125 269.125	SYRACUSE TOWER 120.3 239.0	GND CON 121.7 348.6	CLNC DEL 125.05 257.775
------------------------	--	--------------------------------------	-------------------------------	-----------------------------------

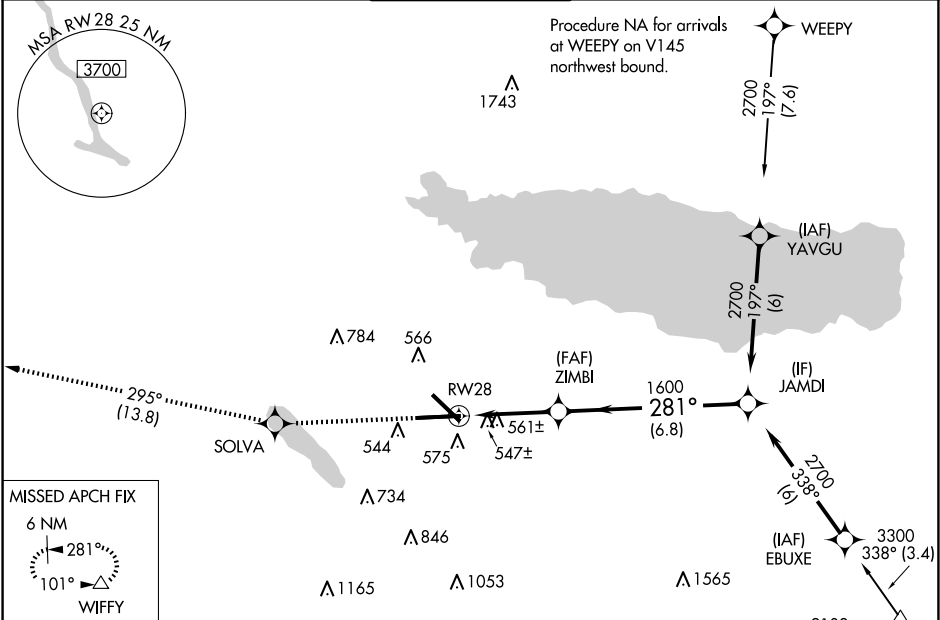

ELEV 421	D	TDZE 413
-----------------	----------	-----------------

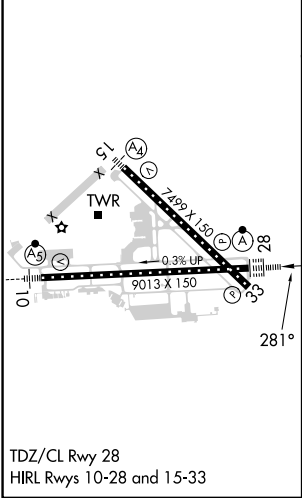

3000 SOLVA tr 295° WIFFY			
*1.1 NM to RW28 *LNAV only			
RW28 1.1 2.5 NM 6.8 NM			
CATEGORY	A	B	C D
LPV DA	613/18 200 (200-½)		
LNAV/VNAV DA	850/50 437 (500-1)		
LNAV MDA	820/24 407 (400-½)	820/40 407 (400-¾)	
CIRCLING	900-1 479 (500-1)	920-1 499 (500-1)	1020-1½ 599 (600-1½) 1180-2½ 759 (800-2½)

NE-2, 17 APR 2025 to 15 MAY 2025

NE-2, 17 APR 2025 to 15 MAY 2025