

WAAS CH 42834 W21A	APP CRS 215°	Rwy Idg TDZE Apt Elev	7001 1047 1078
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21


TOPEKA RGNL (F/OE)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F).

⚠ When local altimeter setting not received, use Philip Billard Muni altimeter setting and increase all DA 45 feet and all MDA 60 feet, increase LPV and LNAV/VNAV all Cats visibility to 1 mile and increase LNAV Cat C/D visibility and Circling Cat D visibility ¼ mile. DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Philip Billard Muni altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct
IDJOP and hold.

ATIS 128.25	KANSAS CITY CENTER 123.8 343.7	FORBES TOWER★ 120.8 (CTAF) 340.2	GND CON 118.425 275.8	UNICOM 122.95
-----------------------	--	--	---------------------------------	-------------------------

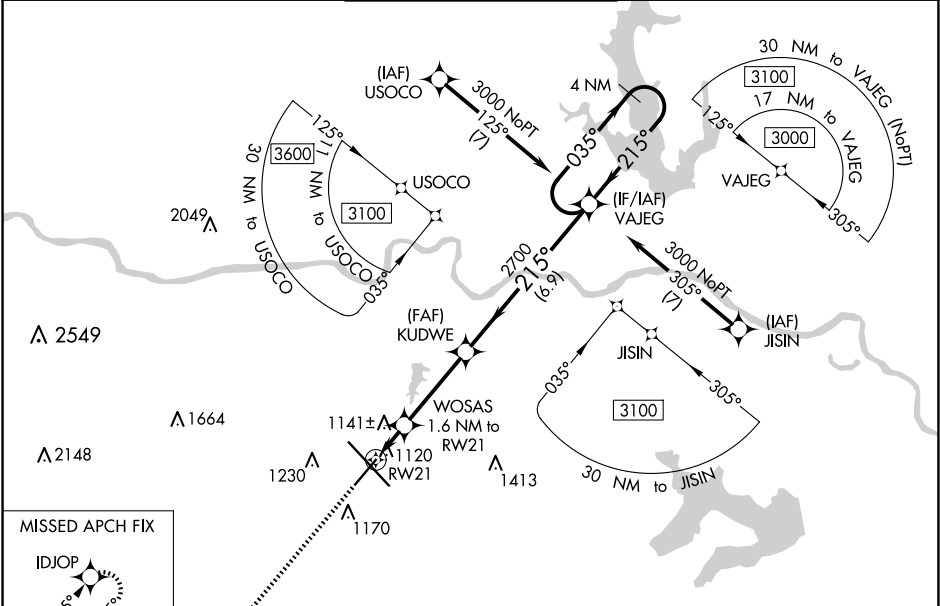

ELEV 1078 TDZE 1047	
3000 IDJOP	VAJEG 4 NM Holding Pattern
*LNAV only.	WOSAS 1.6 NM to RW21
*1.1 NM to RW21	KUDWE 2700
1600*	2700
GP 3.00° TCH 51	
1.1 NM 0.5 3.4 NM 6.9 NM	
CATEGORY	A B C D
LPV DA	1311-1 264 (300-1)
LNAV/VNAV DA	1297-¾ 250 (300-¾)
LNAV MDA	1440-1 393 (400-1) 1440-1½ 393 (400-1½)
CIRCLING	1520-1 442 (500-1) 1580-1 502 (600-1) 1580-1½ 502 (600-1½) 1700-2 622 (700-2)

