



|                                              |                        |                                                               |
|----------------------------------------------|------------------------|---------------------------------------------------------------|
| VORTAC ACT<br><b>115.3</b><br>Chn <b>100</b> | APP CRS<br><b>321°</b> | Rwy Idg <b>5103</b><br>TDZE <b>516</b><br>Apt Elev <b>516</b> |
|----------------------------------------------|------------------------|---------------------------------------------------------------|

VOR/DME RWY 32  
WACO RGNL (ACT)

**V** VDP NA with Mc Gregor Exec altimeter setting. When local altimeter setting  
**A** not received use Mc Gregor Exec altimeter setting and increase all MDA 40  
feet; increase S-32 Cats C/D visibility  $\frac{1}{8}$  mile and Circling Cat D visibility  $\frac{1}{4}$  mile.  
ASR

**MISSED APPROACH:** Climb to 3000 direct ACT VORTAC and hold, continue climb-in-hold to 3000.

|                       |                                         |                                             |                         |                         |
|-----------------------|-----------------------------------------|---------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>123.85</b> | WACO APP CON ★<br><b>127.65 227.125</b> | WACO TOWER ★<br><b>119.3 (CTAF) 0 257.8</b> | GND CON<br><b>121.9</b> | UNICOM<br><b>122.95</b> |
|-----------------------|-----------------------------------------|---------------------------------------------|-------------------------|-------------------------|

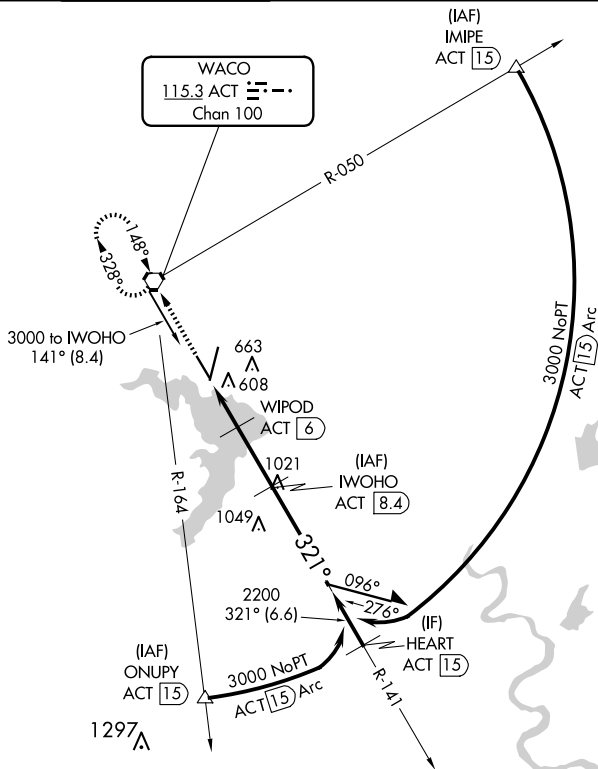

|          |          |          |
|----------|----------|----------|
| ELEV 516 | <b>D</b> | TDZE 516 |
|----------|----------|----------|

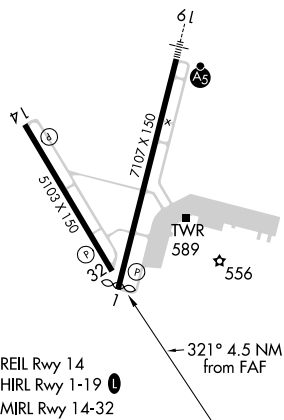


Diagram illustrating the geometry of a circling approach. The diagram shows a 3000 ft MSL circling altitude. A 141° angle is shown between the 3000 ft altitude and the 2200 ft MSL altitude. A 321° angle is shown between the 2200 ft MSL altitude and the 1300 ft MSL altitude. The 1300 ft MSL altitude is 3.42° above the TCH 61° angle. The diagram also shows the IWOHO ACT 8.4, WIPOD ACT 6, and ACT 4.9, 4.0, and 0.9. The diagram is divided into four categories: A, B, C, and D. Category A is the area between the 1300 ft MSL altitude and the 2200 ft MSL altitude. Category B is the area between the 2200 ft MSL altitude and the 3000 ft MSL altitude. Category C is the area between the 3000 ft MSL altitude and the 344 (400-1) ft MSL altitude. Category D is the area between the 344 (400-1) ft MSL altitude and the 1160-2 ft MSL altitude. The diagram also shows the 940-1, 980-1, 1020-1½, and 1160-2 ft MSL altitudes. The diagram is labeled "CIRCLING" and "CIRCLING".