

VORTAC DQO	APP CRS	Rwy Idg	7000
114.0	261°	TDZE	72
Chan 87		Apt Elev	80


VOR RWY 27

NEW CASTLE (ILG)


⚠ Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Philadelphia Intl altimeter setting and increase all MDAs 60 feet; increase S-27 Cat B and Circling Cat C/D visibility ¼ SM and S-27 Cat C/D visibility ½ SM; WIROL fix minimums S-27 increase Cat C/D and Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 on DQO VORTAC R-274 to GLEEM INT/DQO 5.1 DME and hold.

ATIS	PHILADELPHIA APP CON	WILMINGTON TOWER ★	GND CON	CLNC DEL	UNICOM
123.95	118.35 323.1	126.0 (CTAF) 352.05	121.7 275.8	119.95	122.95

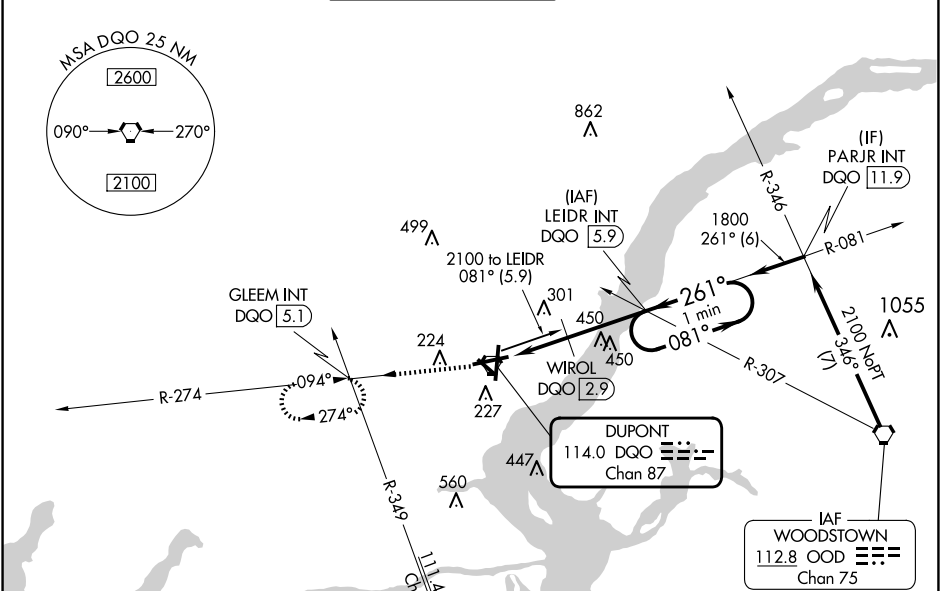

ELEV 80	D	TDZE 72
---------	---	---------



REIL Rwy 9, 19 and 27
HIRL Rwy 1-19 and 9-27
MIRL Rwy 14-32

FAF to MAP 5.9 NM					
Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

2000 ↑ DQO R-274		GLEEM INT		LEIDR INT DQO 5.9		One Minute Holding Pattern	
DQO VORTAC		WIROL DQO 2.9		1800		081° → 2100 ← 261°	
800*		261°		3.00 TCH 54		* 860 when using Philadelphia Intl altimeter setting.	
0.6		2.3		3 NM			
CATEGORY	A		B		C		D
S-27	800-1 728 (800-1)				800-2 728 (800-2)		
CIRCLING	800-1 720 (800-1)				800-2 720 (800-2)		800-2 1/4 720 (800-2 1/4)
WIROL FIX MINIMUMS (DME REQUIRED)							
S-27	560-1 488 (500-1)				560-1 3/8 488 (500-1 3/8)		
CIRCLING	560-1 480 (500-1)				600-1 1/2 520 (600-1 1/2)		800-2 1/4 720 (800-2 1/4)