

LOC/DME I-YKM	APP CRS	Rwy Idg	7604
110.1	274°	TDZE	1068
Chan 38		Apt Elev	1099


ILS or LOC RWY 27
YAKIMA AIR TRML/MCALLISTER FLD (YKM)

DME required for procedure entry. DME required for LOC only.


When local altimeter setting not received, procedure NA. Circling NA south of Rwy 9 and 27. For inop ALS, increase S-LOC 27 Cats C/D visibility to 2 SM. For inop ALS, increase S-ILS 27 all Cats visibility to 1½ SM. #RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR MISSED APPROACH: Climb to 2900 then climbing right turn to 4900 direct YKM VORTAC and hold, continue climb-in-hold to 4900. # Missed approach requires minimum climb of 275 feet per NM to 3600.

ATIS	SPOKANE APP CON*	YAKIMA TOWER*	GND CON	CLNC DEL	UNICOM
125.25	123.8 263.15	133.25 (CTAF) 0 257.8	121.9	121.9	122.95

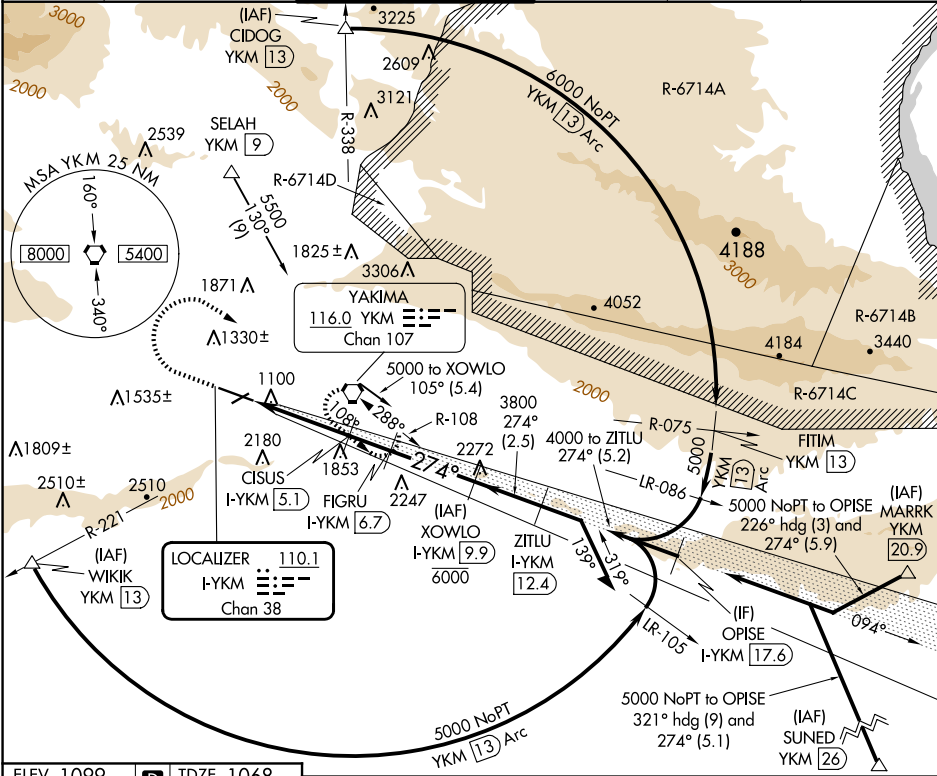

ELEV 1099	TDZE 1068
-----------	-----------

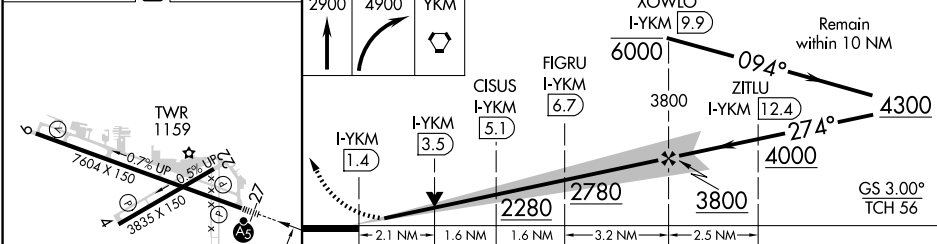

CATEGORY	A	B	C	D
S-ILS 27 #	1268/24	200 (200-½)		
S-ILS 27	1713-1½	645 (700-1½)		
S-LOC 27	1780/24	712 (700-½)	1780-1½	712 (700-1½)
CIRCLING	1780-1	681 (700-1)	1940-2½	2280-3
			841 (900-2½)	1181 (1200-3)

YAKIMA, WASHINGTON
Amdt 1B 06OCT22

YAKIMA AIR TRML/MCALLISTER FLD (YKM)
ILS or LOC RWY 27