

APP CRS	Rwy Idg	7110
211°	TDZE	404
	Apt Elev	410

RNAV (RNP) Z RWY 21R


TRI-CITIES (PSC)

⚠ For uncompensated Baro-VNAV systems, procedure NA below -14°C (7°F) or above 54°C (130°F). GPS required. RF required. For inoperative MALSR, increase RNP 0.11 all Cats visibility to RVR 5700 and RNP 0.30 all Cats visibility to 1½ mile.

MALSR

MISSED APPROACH: Climb to 5200 on track 211° to KARTE, right turn to DAMSE, and on track 332° to PAIDS and hold.

ATIS 125.65	SPOKANE APP CON ★ 128.75 377.2	TRI-CITIES TOWER ★ 135.3 (CTAF) 0 323.3	GND CON 121.8	CLNC DEL 120.0	UNICOM 122.95
----------------	-----------------------------------	--	------------------	-------------------	------------------

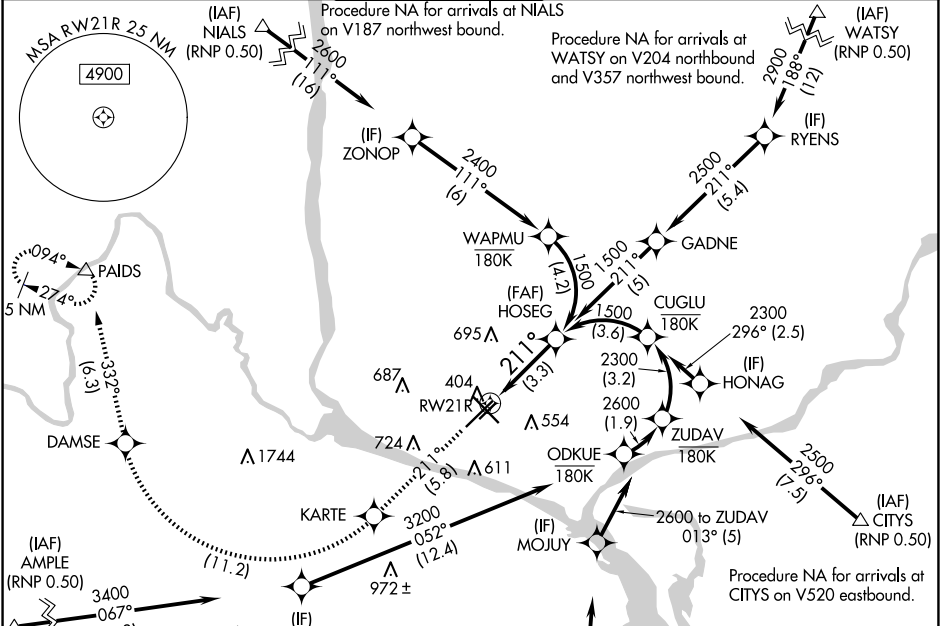

ELEV 410	TDZE 404
----------	----------

5200 KARTE

tr 211°

DAMSE

tr 332°

PAIDS

△

HOSEG

1500

See planview for multiple IF locations.

RW21R

211°

3.3 NM

GP 3.00° TCH 55

CATEGORY	A	B	C	D
RNP 0.11 DA		754/33	350 (400-%)	
RNP 0.30 DA		832/48	428 (500-1)	

AUTHORIZATION REQUIRED

REIL Rwy 3L and 12

MIRL Rwy 12-30

HIRL Rwy 3L-21R

NW-1, 17 APR 2025 to 15 MAY 2025

NW-1, 17 APR 2025 to 15 MAY 2025