

ILS RWY 21L (CAT II)

LOC I-SUU <u>110.1</u>	APCH CRS 215°	Rwy Idg 10,995 TDZE 58 Arpt Elev 63
----------------------------------	-------------------------	--

[USAF]

TRAVIS AFB (KSUU)

RNAV1 - GPS or RADAR required.

RADAR required for CAT E aircraft for full procedure off of SEATO.




ALSF-2




MISSED APPROACH: Climb to 2200 then climbing right turn to 4500 direct SEATO and hold. continue climb in hold to 4500.

ATIS		APP CON		TOWER		GND CON		CLNC DEL	
135.55	292.125	119.9	322.325 (S)						
		126.6	281.45 (N)	120.75	254.4	121.8	289.4	127.55	335.8

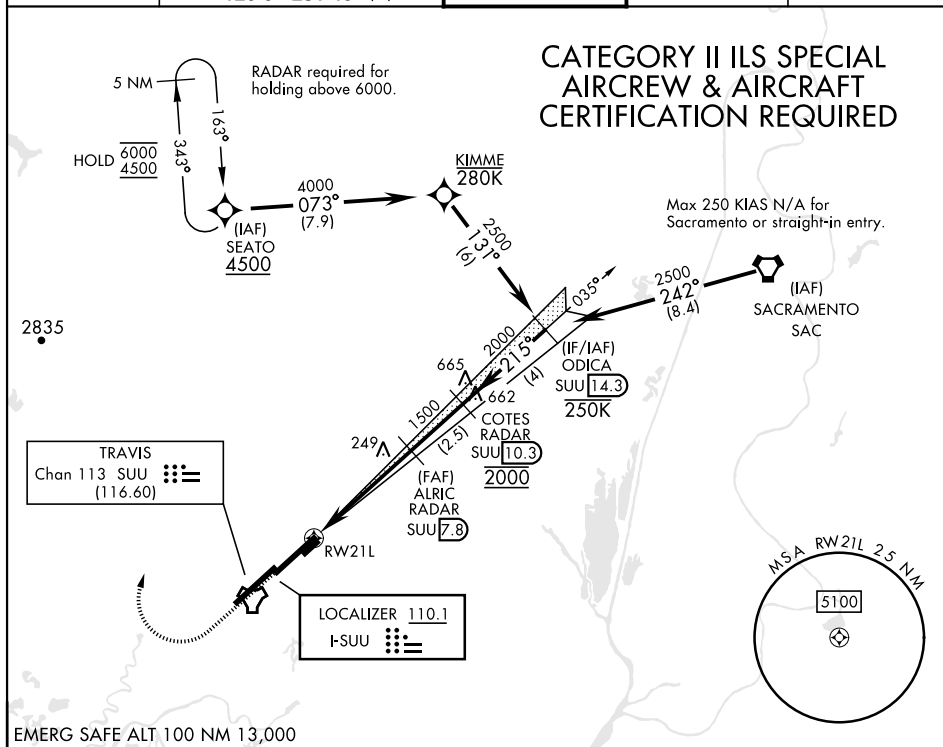

EMERG SAFE ALT 100 NM 13.000

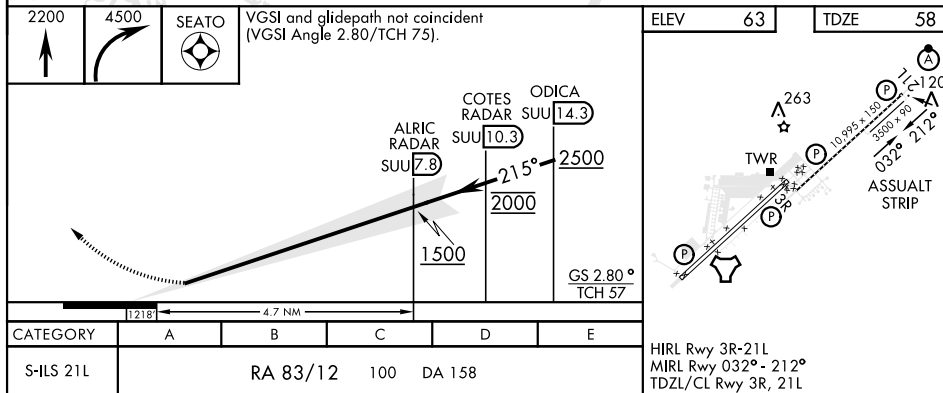

FAIRFIELD, CALIFORNIA

38°16'N-121°55'W

TRAVIS AFB (KSUU)

Orig 19MAY22

ILS RWY 21L (CAT II)

SW-2, 17 APR 2025 to 15 MAY 2025

SW-2, 17 APR 2025 to 15 MAY 2025