

WAAS CH 72932 W08A	APP CRS 081°	Rwy Idg TDZE 589 Apt Elev 595
--	------------------------	---

RNAV (GPS) RWY 8

SAN MARCOS RGNL (HYI)

RNP APCH.


▼

⚠

Circling NA for Cat E SW of Rwy 13-31. Rwy 8 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP NA with New Braunfels altimeter setting. When local altimeter setting not received, use New Braunfels altimeter setting and increase LPV DA to 882, LNAV/VNAV DA to 953 and increase all MDA 60 feet; increase LNAV Cat C/D/E and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH:
Climb to 3000 direct QIMB and hold.

ATIS 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF) 0	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)
------------------------	---------------------------------------	---	---------------------------	----------------------------	--

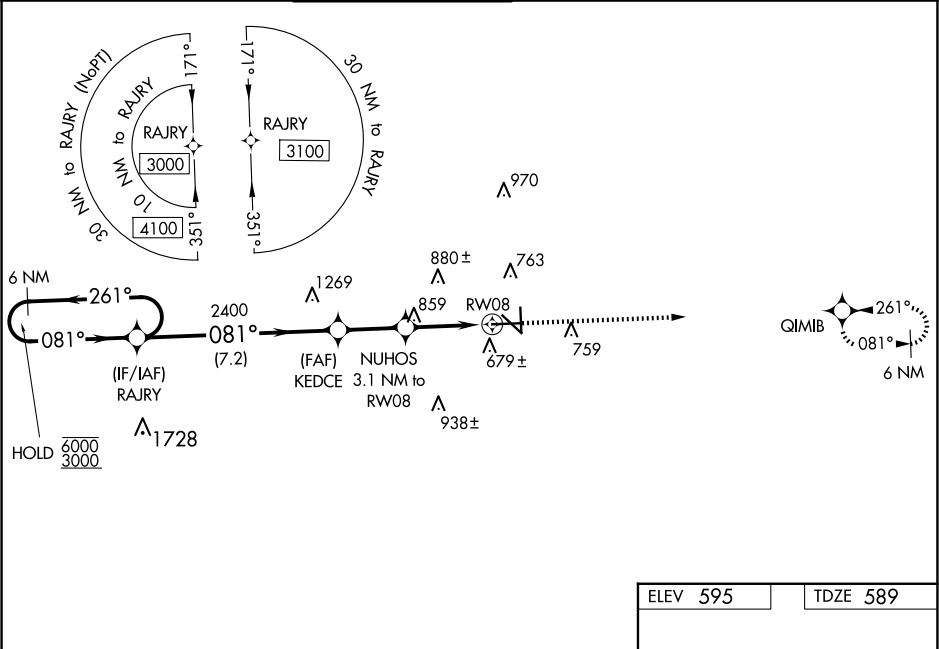

6 NM Holding Pattern		RAJRY		KEDCE		NUHOS 3.1 NM to RW08		*1.5 NM to RW08		RW08		3000 ↑ QIMB		*LNAV only.	
6000 ← 261° 3000 → 081°				081°		2400		*1620							
GP 3.00° TCH 55															
		7.2 NM		2.4 NM		1.6 NM		1.5 NM							
CATEGORY		A		B		C		D		E					
LPV DA		839-1 250 (300-1)													
LNAV/ VNAV DA		910-1 321 (400-1)													
LNAV MDA		1120-1	531 (600-1)	1120-1½ 531 (600-1½)											
CIRCLING		1120-1	525 (600-1)	1240-1¾ 645 (700-1¾)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)									

