

CLOVIS, NEW MEXICO

RNAV (GPS) RWY 4

WAAS CH 41172 W04A	APCH CRS 038°	Rwy Idg 10,003 TDZE 4284 Arpt Elev 4295
--------------------------	------------------	---

AL-512 (USAF)

CANNON AFB (KCVS)

T * When ALS inop, increase RVR to 40, vis to 3/4 mile.
 ** When ALS inop increase RVR to 60 vis to 1 1/8 miles.
 *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile;
 CAT CDE RVR to 60, vis to 1 1/8 miles.

ALSF-1

MISSED APPROACH: Climb to 7000 direct FETEP, then track to HEKDI and hold.

ATIS 119.1 269.9	CANNON APP CON 118.425 352.1	TOWER 120.4 270.25	GND CON 121.9 275.8	CLNC DEL 120.2 293.225
---------------------	---------------------------------	-----------------------	------------------------	---------------------------

4705

DME/DME RNP-0.3 NA

For uncompensated Baro-VNAV systems, Procedure NA below 7°C (45°F) or above 54°C (130°F).

HOLD $\overline{10,000}$
7000

HEKDI

FETEP   4770

4299

(FAF)
FINDI

(IAF)
CURAM

HOLD 8000
7000

EMERG SAFE ALT 100 NM 9000

5 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI angle 2.50/TCH 41).

7000
↑

FETEP

ELEV 4295

TDZE 4284


8000 ← 180°
7000 360° →

38.

6000

GP 2.50°
TCH 46

CATEGORY	A	B	C	D	E
LPV DA*	4484/24		200	(200-½)	
LNAV/VNAV DA**	4700/40		416	(500-¾)	
LNAV MDA***	4700/24	416 (500-½)	4700/40	416	(500-¾)
C CIRCLING	4840-1	545 (600-1)	4840-1½ 545 (600-1½)	4980-2¼ 685 (700-2¼)	5020-2½ 725 (800-2½)

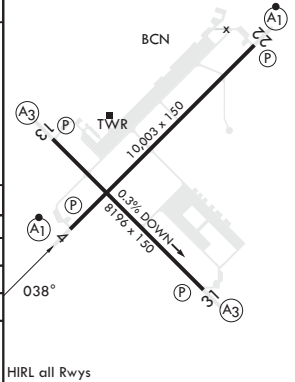

CLOVIS, NEW MEXICO

34°23'N - 103°19'W

CANNON AFB (KCVS)

Amdt 3 07OCT21

RNAV (GPS) RWY 4

SW-1, 17 APR 2025 to 15 MAY 2025

SW-1, 17 APR 2025 to 15 MAY 2025