

LOC/DME I-LEI	APP CRS	Rwy Idg	7500
108.5	234°	TDZE	435
Chan 22		Apt Elev	435

ILS or LOC RWY 23L

RALEIGH-DURHAM INTL (RDU)



RNAV 1-DME/DME/IRU or GPS or RADAR required for procedure entry.
DME required for LOC only.

Simultaneous approach authorized. For inop ALS, increase S-ILS 23L all Cats visibility to RVR 5500. Localizer unusable for coupled approaches below 1100 or within 2 NM of threshold.

MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 2600 on heading 050° and RDU VORTAC R-092 to ZEBUL INT and hold.

D-ATIS	RALEIGH APP CON	RALEIGH TOWER	GND CON	CINC DEL	CPDLC
123.8	127.675 307.9	127.45 257.8	121.9 348.6	120.1	

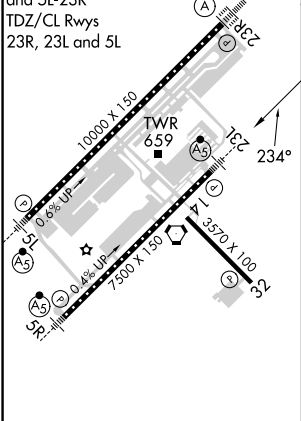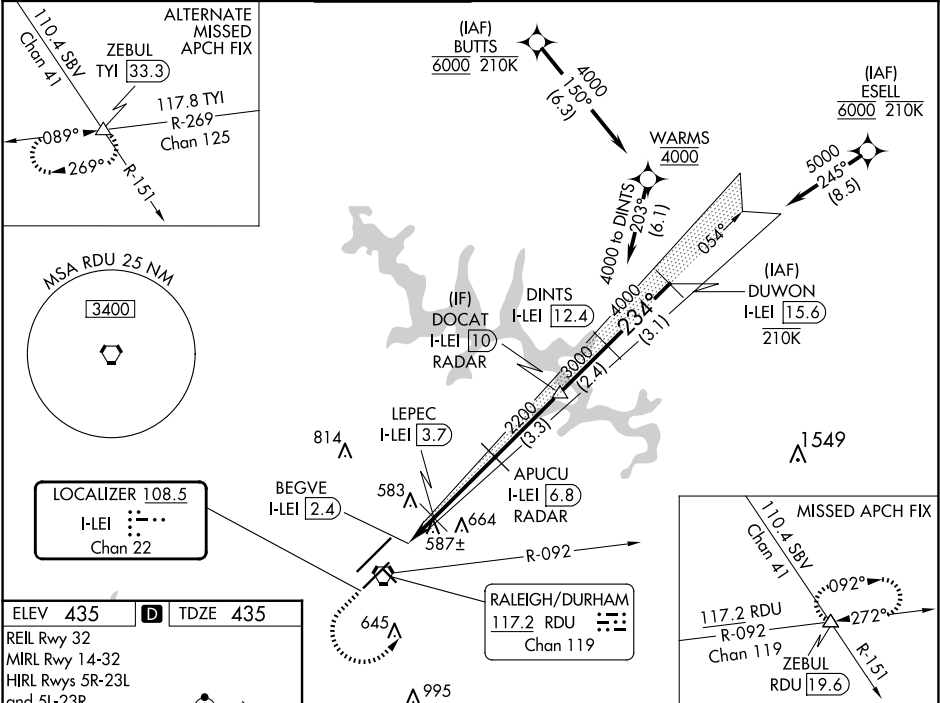

1100	2600	ZEBUL	Localizer unusable from 1 NM from threshold.	DUWON
hdg 050°	RDU R-092	△		I-LEI 15.6
*LOC only.		APUCU		I-LEI 12.4
		I-LEI 6.8		RADAR
		LEPEC		I-LEI 3.7
		BEGVE		I-LEI 2.4
				2200
				3000
				4000
				5000
				GS 3.00°
				TCH 56
CATEGORY	A	B	C	D
S-ILS 23L	806/35	371 (400-¾)		
S-LOC 23L	840/40	405 (500-¾)		
CIRCLING	960-1¼	525 (600-1¼)	1020-1½ 585 (600-1½)	1180-2½ 745 (800-2½)